


For construction in non-cyclonic areas  
Wind rating: N2 as per AS4055-2012.  
If you require a higher wind rating please contact  
us: admin@absco.com.au or 1800 029 701

When laying concrete slab, ensure there  
is a rebated edge 25mm deep around  
the perimeter. This will help water egress  
from the base of the shed.

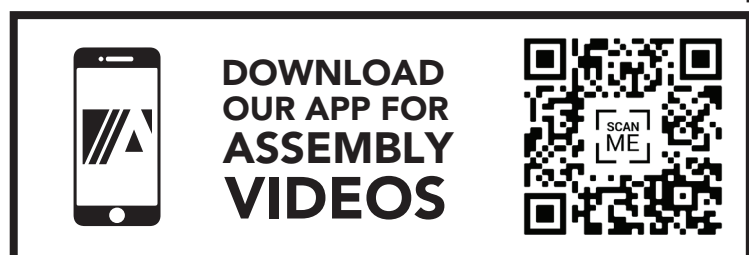

## PLEASE LEAVE A REVIEW

Tell us about your experience!  
Visit [www.abscosheds.com.au/review](http://www.abscosheds.com.au/review)


### GENERAL INSTRUCTIONS

- Before commencing any assembly, read through these instructions in detail to gain a thorough understanding of assembly methods and associated details.
- Unpack the carton and carefully identify and check off all the parts against the parts described and illustrated on "COMPONENTS PACKING LIST" pages.
- Local authority approval must be obtained prior to construction of the shed. Once you have selected your site you will need to lodge a site plan to your local council.

### SITE PREPARATION

- The site for the shed must be level. An uneven surface may result in misalignment of parts.
- The shed shall be erected on top of a reinforced concrete slab and anchored down appropriately illustrated on "FINAL CONSTRUCTION" page. **If using a rebated slab ensure that all frame uprights are trimmed 25mm.**

### TOOLS REQUIRED

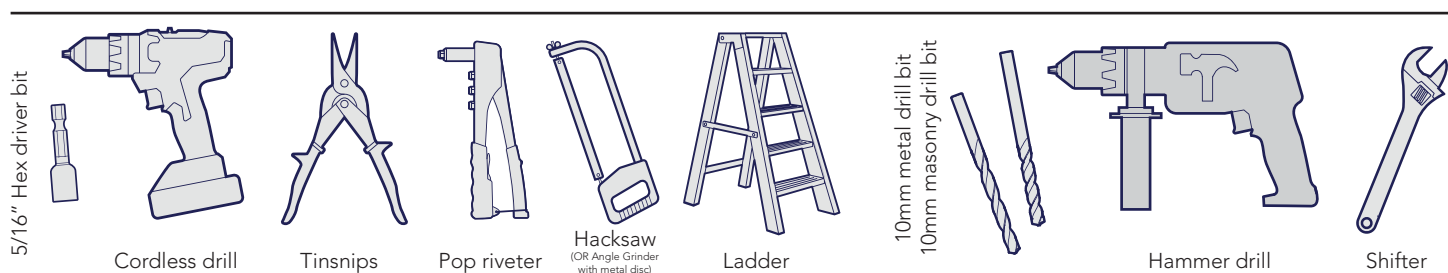

### SAFETY NOTES













- Some parts may have sharp edges. It is advisable to wear gloves when handling these items and safety glasses if drilling holes. Sensible shoes are highly recommended.
- Do not erect your shed in windy conditions.
- It is highly recommended to erect the shed with two or more people.

### RECOMMENDED



















## COMPONENT PACKING LIST

Check off all components.














MAIN PACK CARTON (PACK 1 OF 2)							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
<b>12</b>	 STEEL SHEET 1170mm X 773mm	<b>49A</b>		<b>2</b>	GABLE L/H L=1105mm 	<b>17L</b>	
<b>1</b>	 STEEL SHEET 2034mm X 711mm	<b>H34</b>		<b>2</b>	GABLE R/H L=1105mm 	<b>17R</b>	
<b>1</b>	 STEEL SHEET 2034mm X 711mm	<b>H35</b>		<b>1</b>	 RIDGE BEAM JOINER L: 450mm (17.7")	<b>ZARSP</b>	
<b>1</b>	 STEEL SHEET 1974mm X 773mm	<b>E</b>		<b>4</b>	 BRACE L= 393mm	<b>13A</b>	
<b>1</b>	 STEEL SHEET 1974mm X 773mm	<b>F</b>		<b>1</b>	 RIDGE BEAM L = 1521mm	<b>97AL</b>	
<b>1</b>	CHANNEL SET (SEE PAGES 4&5)			<b>1</b>	 RIDGE BEAM L = 1521mm	<b>97AR</b>	
<b>1</b>	FITTINGS & ACCESSORIES PACKET (SEE PAGE 6)			<b>1</b>	 RIDGE BEAM L = 1513mm	<b>97C</b>	

Nominal sheet widths are shown. +/- 2mm is within tolerance.
















## COMPONENT PACKING LIST

CHANNEL SET (IN MAIN PACK 1 OF 2)							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
1	 CHANNEL L = 1496.5mm	55AL		1	 CHANNEL L = 1496.5mm	55AR	
1	 CHANNEL L = 1496.5mm	55BL		1	 CHANNEL L = 1496.5mm	55BR	
1	 CHANNEL L = 1496.5mm	55CL		1	 CHANNEL L = 1496.5mm	55CR	
2	 CHANNEL L = 1496.5mm	60AL		2	 CHANNEL L = 1496.5mm	60AR	
2	 CHANNEL L = 1126.5mm	76BL		2	 CHANNEL L = 1126.5mm	76BR	
2	 CHANNEL L = 1496.5mm	81AL		2	 CHANNEL L = 1496.5mm	81AR	
1	 CHANNEL L = 1496.5mm	81BL		1	 CHANNEL L = 1496.5mm	81BR	
2	 CHANNEL L = 1126.5mm	81CL		2	 CHANNEL L = 1126.5mm	81CR	











## COMPONENT PACKING LIST

CHANNEL SET (IN MAIN PACK 1 OF 2) CONTINUED							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
<b>2</b>	 CHANNEL L = 1513mm	53C		<b>2</b>	 CHANNEL WITH HINGES L = 1974mm	HC1	
<b>4</b>	 CHANNEL L = 773mm	58C		<b>2</b>	 Part No. Here JAMB L = 2035mm	HJ1	
<b>2</b>	 CHANNEL L = 1513mm	60C		<b>1</b>	 Part No. Here JAMB L = 1974mm	HJ3	
<b>1</b>	 CHANNEL L = 1568mm	79A		<b>4</b>	 Part No. Here JAMB L = 1120mm	91A	
<b>2</b>	 CHANNEL L = 1513mm	81E		<b>1</b>	 Part No. Here JAMB L = 1568mm	90A	
<b>2</b>	 CHANNEL L = 1513mm	81F		<b>4</b>	 LIP TRIM L = 1170mm	86A	
<b>1</b>	 CHANNEL L = 1974mm	HC2					

## COMPONENT PACKING LIST

FITTINGS & ACCESSORIES PACKET CONTENTS							
QTY	COMPONENT DESCRIPTION	PART No.	CHECK	QTY	COMPONENT DESCRIPTION	PART No.	CHECK
<b>1</b>	DOUBLE DOOR KIT (DETAILED BELOW)			<b>1</b>	ASSEMBLY INSTRUCTION MANUAL		
<b>2</b>	 CAP GABLE L: 170mm	14A		<b>1</b>	 RIDGE CAP JOINER	98A	
<b>2</b>	 DOOR STRAP L: 165mm	12A		<b>4</b>	 RIDGE PLATES	RBP	
<b>12</b>	 CHANNEL JOINER L= 200mm (7.9")	CSJ		<b>12</b>	 HEX HD TEK SCREW W/ NEO WASHER 10-16x16mm	FAST033	
<b>PSTKDBL - DOUBLE DOOR FITTINGS PACK</b>							
<b>3</b>	 DOOR PADBOLT	FAST006		<b>2</b>	DOOR PADBOLT HASP 	FAST007	
<b>1</b>	3mm DRILL BIT 	DRILL		<b>1</b>	PHILLIPS DRIVER BIT 	FAST038	
<b>1</b>	 SELF TAPPING SCREWS PACKET CONTAINING 220			<b>1</b>	PACK12P SCREW PACK 12		
<b>PACK12P - SCREW PACK 12</b>							
<b>8</b>	 3/16 ROUND HEAD BOLTS & NYLOCK NUTS			<b>12</b>	 3.2 x 8mm BLIND POP RIVETS		
<b>12</b>	 3/16 COUNTERSUNK SCREWS & NUTS						
<b>1</b>	 SELF TAPPING SCREWS PACKET CONTAINING 100						

## COMPONENT PACKING LIST


MAIN PACK CARTON (PACK 2 OF 2)							
<b>7</b>	 <b>STEEL SHEET</b> 2034mm X 773mm	<b>H31</b>		<b>1</b>	<b>HIGH MID-FRAME PACK (SEE BELOW)</b>	<b>HMF</b>	
<b>7</b>	 <b>STEEL SHEET</b> 2034mm X 773mm	<b>H30</b>					
HIGH MID-FRAME CONTENTS (80mm X 40mm CHANNEL SECTIONS)							
<b>4</b>	 <b>C1106</b> CHANNEL L = 1106mm			<b>4</b>	 <b>C1954</b> CHANNEL L = 1954mm		
HIGH MID-FRAME FITTINGS PACK							
<b>4</b>	 <b>KNEE PLATE</b>			<b>8</b>	 <b>DYNABOLT</b>		
<b>4</b>	 <b>APEX PLATE</b>			<b>300</b>	 <b>16mm TEK SCREWS</b>		
<b>4</b>	 <b>MULTI PURPOSE BRACKET</b>			<b>76</b>	 <b>45mm TEK SCREWS</b>		

## SNAPTITE ASSEMBLY GUIDE

The Snaptite Assembly System locks end channels to all roof and wall sheets without the need for tools and fasteners.

To assemble each panel, the perimeter channels are secured to the top and bottom of each panel. Gently tap the channel over the SNAPTITE lugs on the sheet, working along the sheet.

Each perimeter channel must finish flush with the edges of the sheets. Simply tap the channel along the sheets until each end is neatly flush. If you need to remove channels from the panels, slide it off from the side.

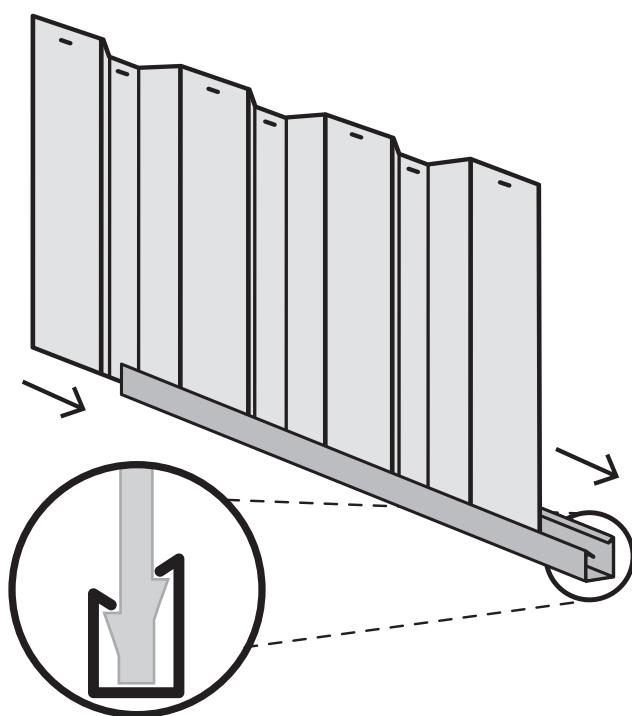

**SNAPTITE**  
World's Easiest Assembly System  
*UNIQUE PATENTED SYSTEM*

Channel locks the shed panel into position without the need for screws!


## FASTENING SYMBOLS

**SNAPTITE**

Secure channel to sheeting by SNAPTITE fastening method.



Join components together with one screw at this location only, as some channels have extra holes that are not required for this model of shed.



Do not join components together at this location yet, as the screws may obstruct further assembly of the other components.



Join components together by pre-drilling the holes first. Use one component as template to mark where the holes are and drill with a 3mm drill bit.



3mm pop rivet



4mm nut and bolt set.


## Guide on Joining Spliced Channels

The text marked on all parts must be shown on the same side as each other



### Step 1.

Position the channels and the CSJ joiner so the centre of the CSJ is in line with the end of each channel to be joined together.

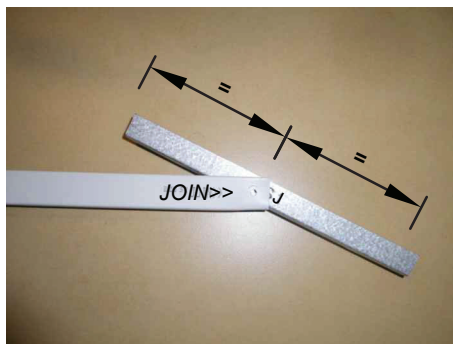


### Step 2.

Join the first channel to the CSJ by inserting the centre of the CSJ, on an angle, to the end of the channel where the JOIN>> text is marked.




Push down one side of the CSJ until you hear a 'click'.

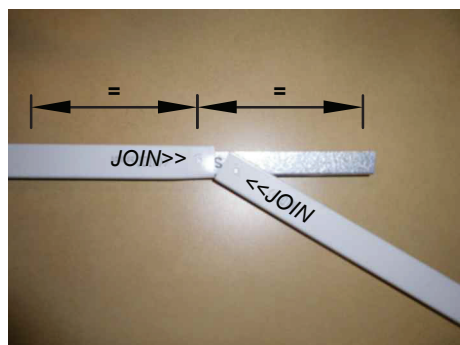

### Step 3.


Join the second channel to the CSJ by positioning the <<JOIN of the channel at the centre of the CSJ, on an angle. Push the CSJ into the channel until you hear a 'click'.

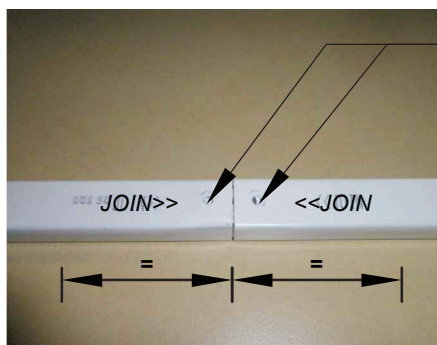


### Finished Channel.

The joined channels should now look like the picture with the CSJ positioned equally inside of the joined channels.

Drill out holes with 3mm drill bit in CSJ to match the holes in channel. Drilling of screws on the joined channels is being done after sheets are locked on the spliced channels.

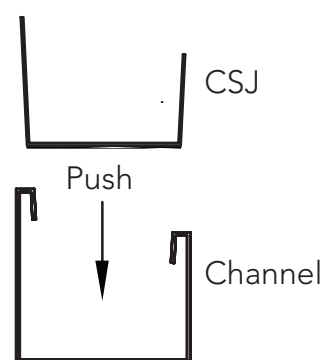


...

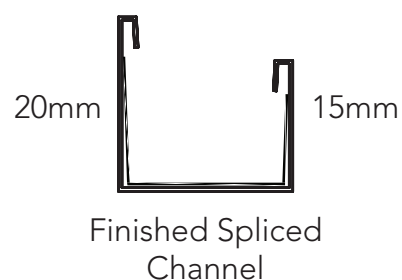

## PRE-ASSEMBLY OF SPLICED CHANNELS


Join together 24 x channel sections using 12 x channel joiners (Part CSJ)

NOTE: Some channels may have holes in them - You will need to redrill holes where CSJ joining channel covers them.

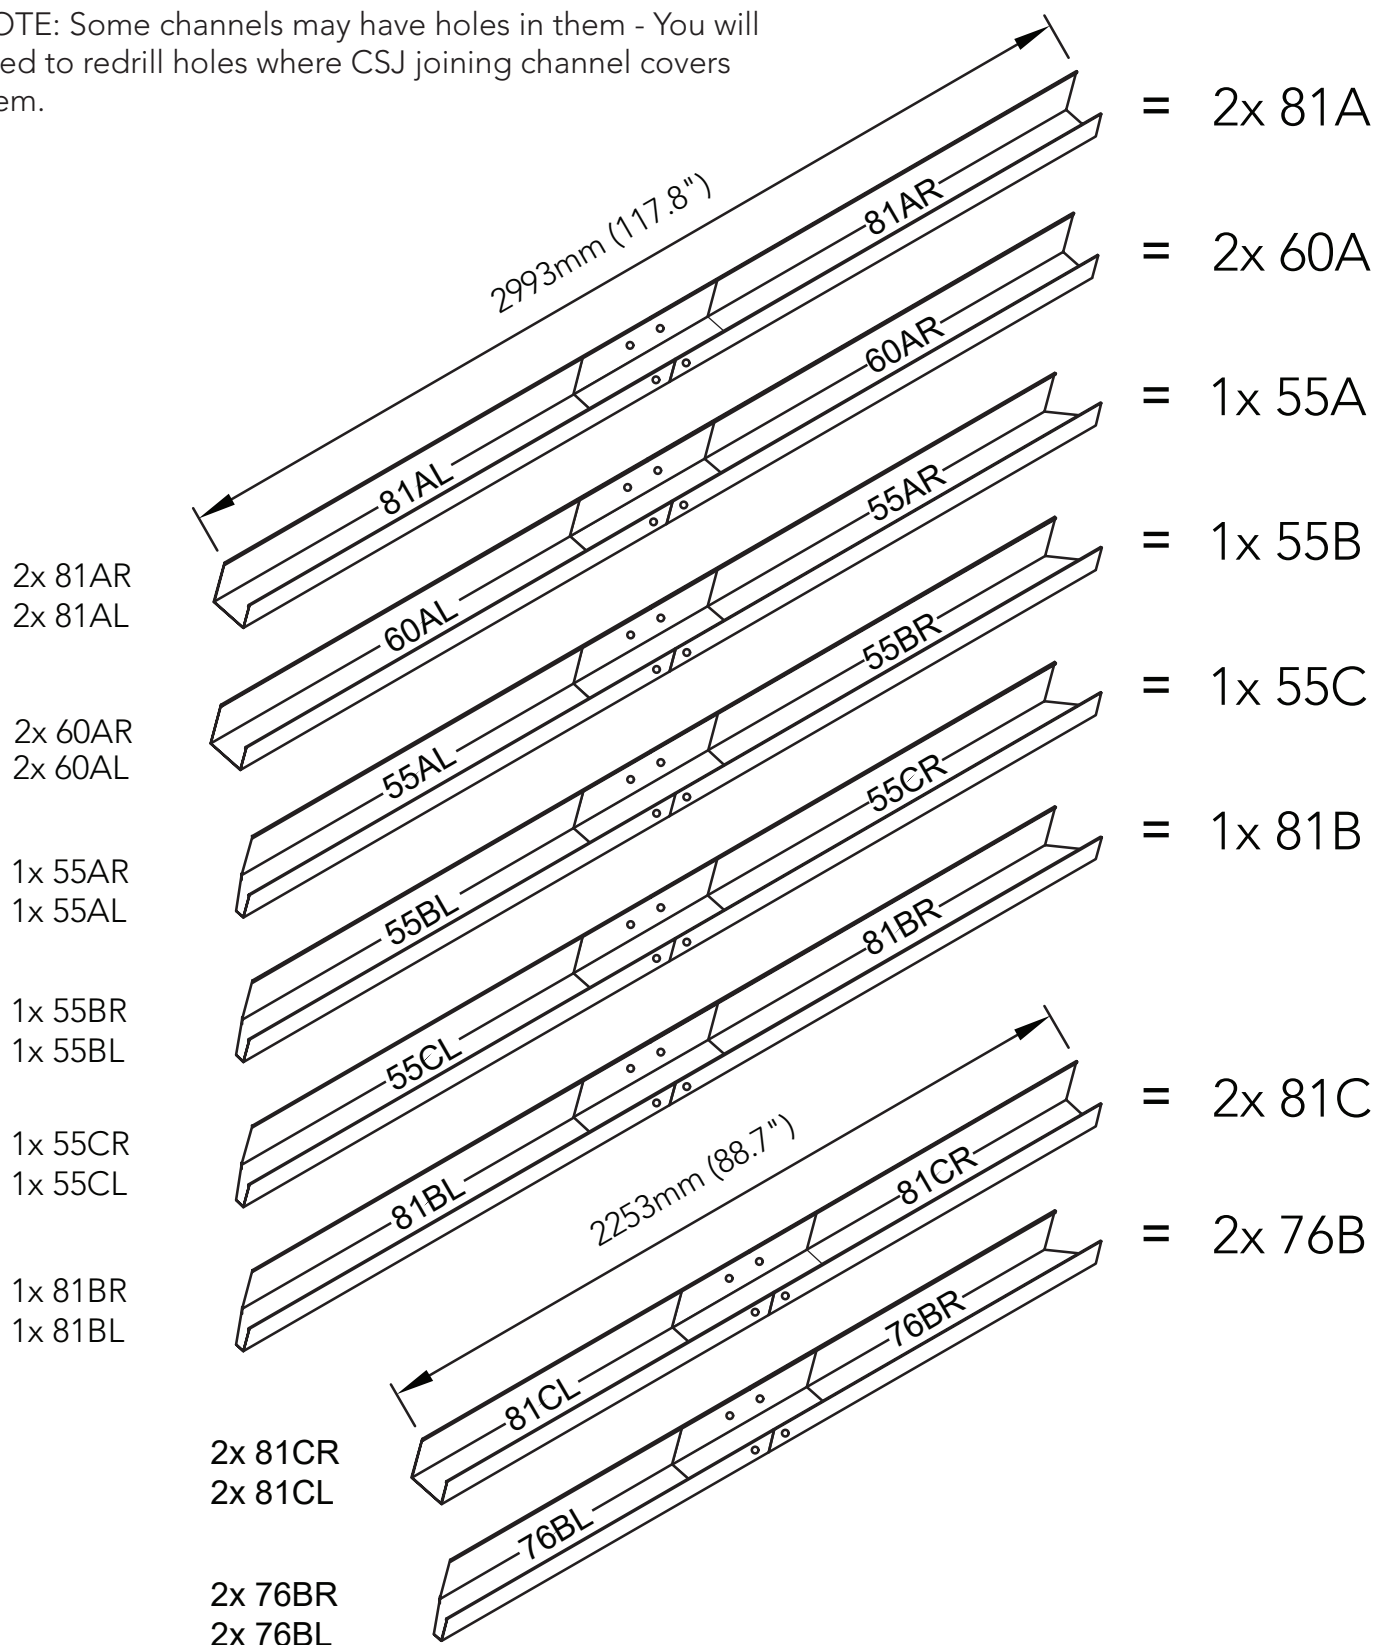


## Guide on Joining a Spliced Ridge Beam


Follow these three steps to assemble a ridge beam.

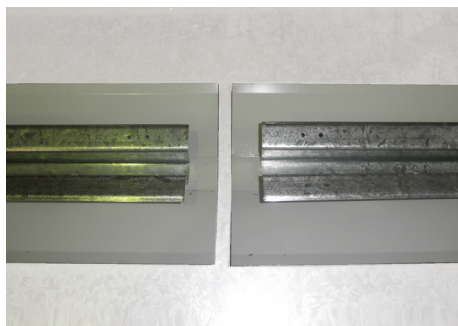

**Step 1.**  
Place two ridge beams as shown and push them together. Slide the cap of one under the other.

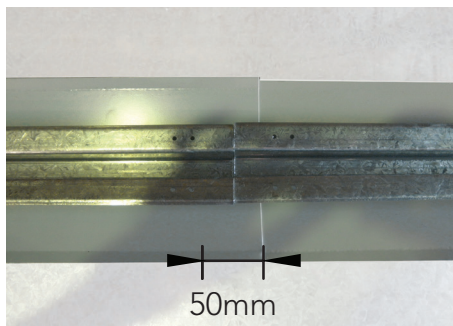

**NOTE.**  
There is a 50mm overlap of the ridge caps when the beams are in position.

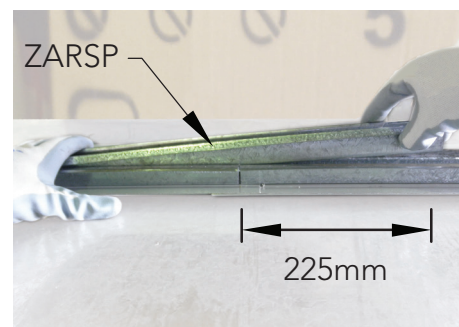

**Step 2.**  
Use the ZARSP to connect at the centre of the two ridge beams. Be sure it is pushed in fully.



**Step 3.**  
Turn over the ridge beam. Measure 250mm from the middle along the centre of one ridge beam, mark spacings of 50mm. Fasten with a Tek screw at each marking.



Repeat to the other side of the ridge beam assembly.

**TIP:** Predrilling each hole with the 3mm drill bit makes it easier to fasten.




Finished Spliced Ridge Beam



Hex Driver Bit



Hex Hd Self-drilling tek screw with neoprene washer

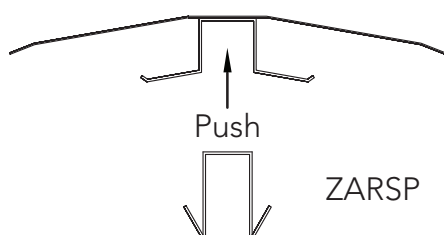


ZARSP





Finished  
Joined Ridge Beams

## PRE-ASSEMBLY OF SPLICED RIDGE BEAM

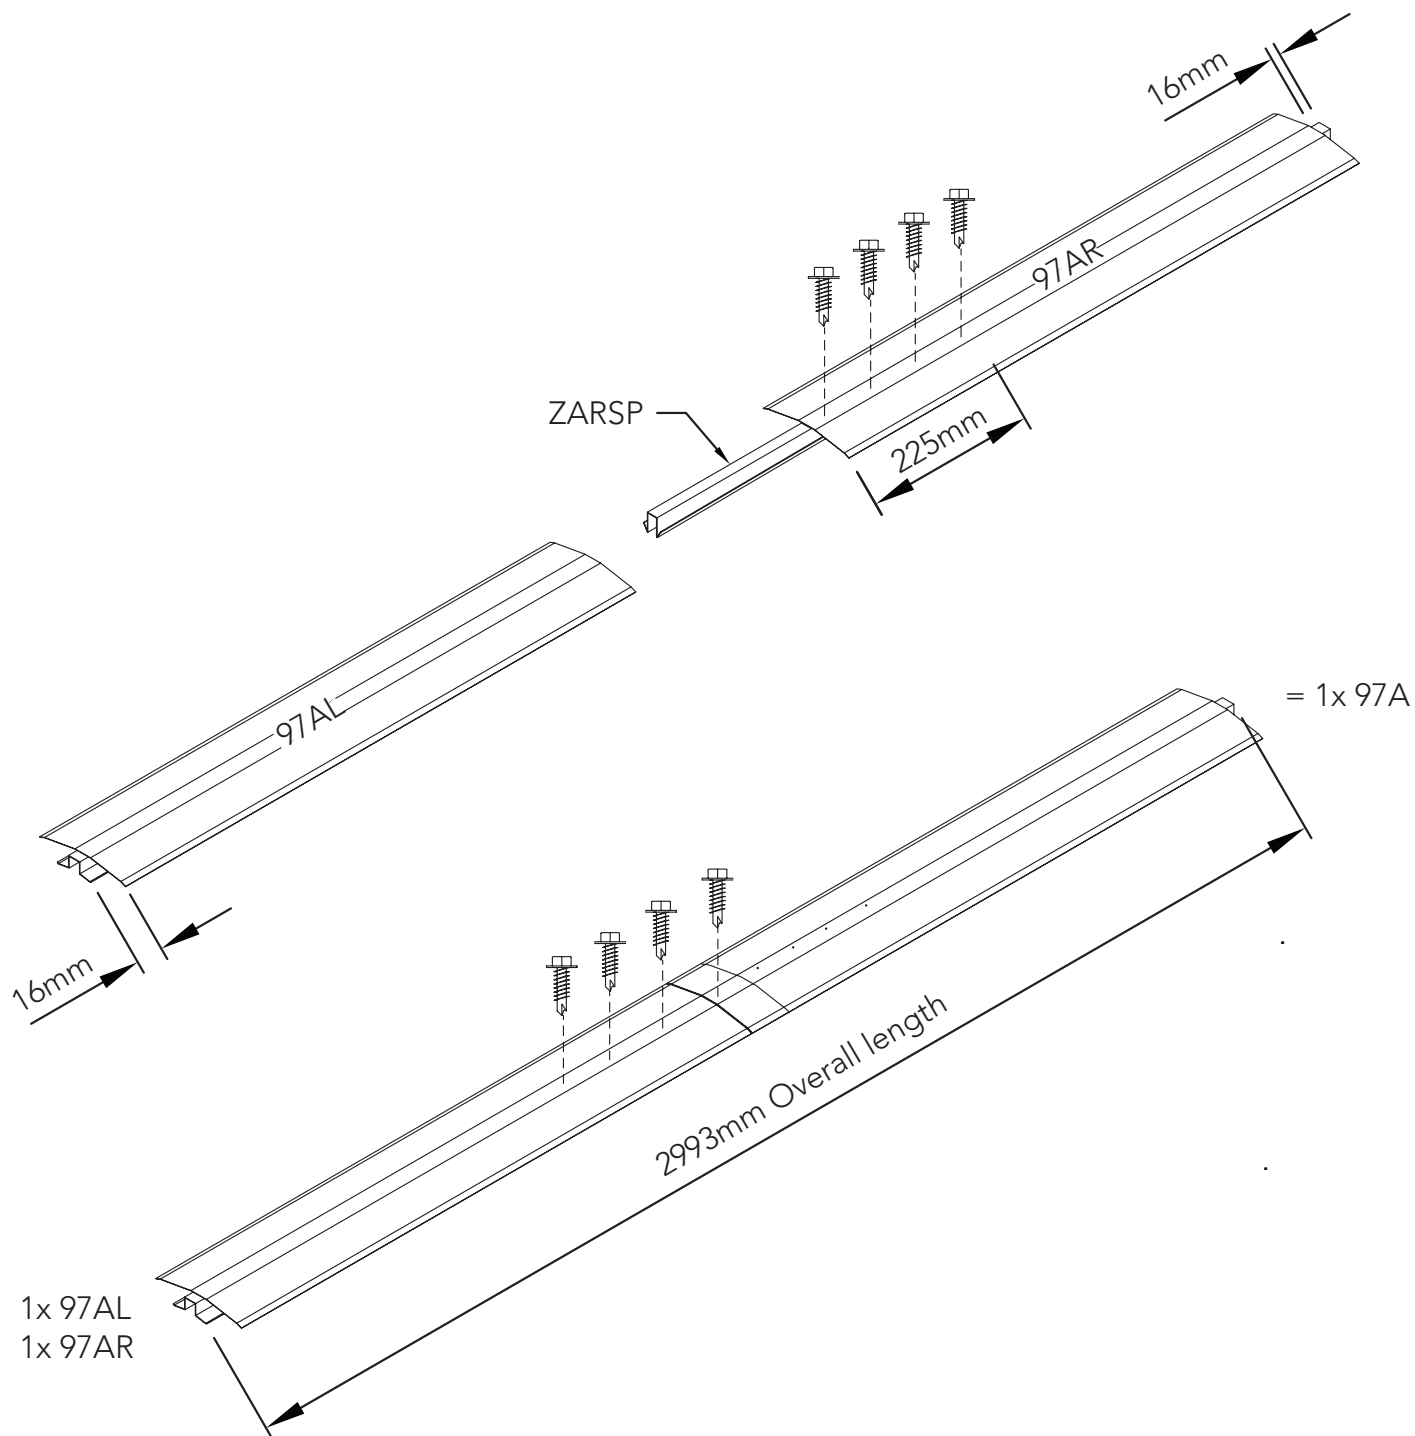

## JOINING RIDGE BEAMS


To make the total span we must now join the last ridge beam

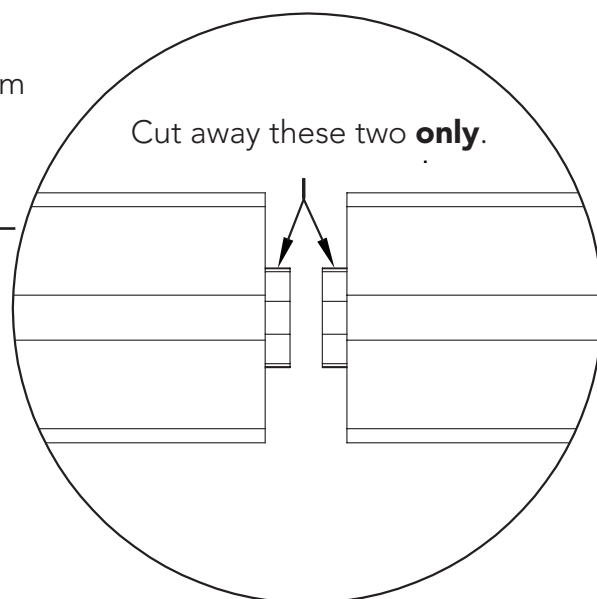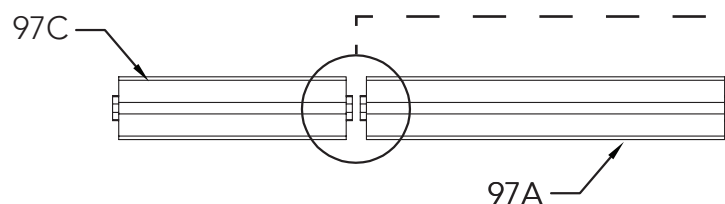


Using a hacksaw, remove one protruding section of each ridge beam, this will allow the sections to butt up neatly to each other.

Position the trimmed ends against one another and then cover join with the 98A.

Fasten with 4x Hex Hd self-drilling teks screws with neoprene washers

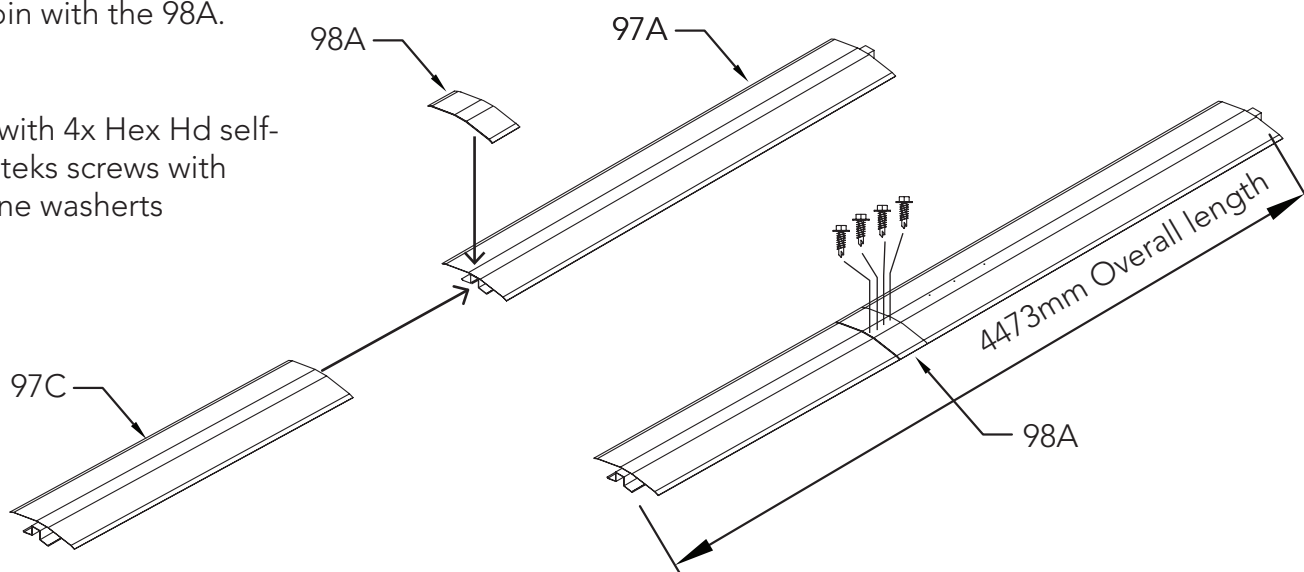


Hex Driver Bit  
Hex Hd Self-drilling tek screw  
with neoprene washer



Finished  
Joined Ridge Beams

NOTE: This join will be further strengthened by the portal frame ridge beam connection plates during final construction.

## OVERVIEW OF ROOF COMPONENTS

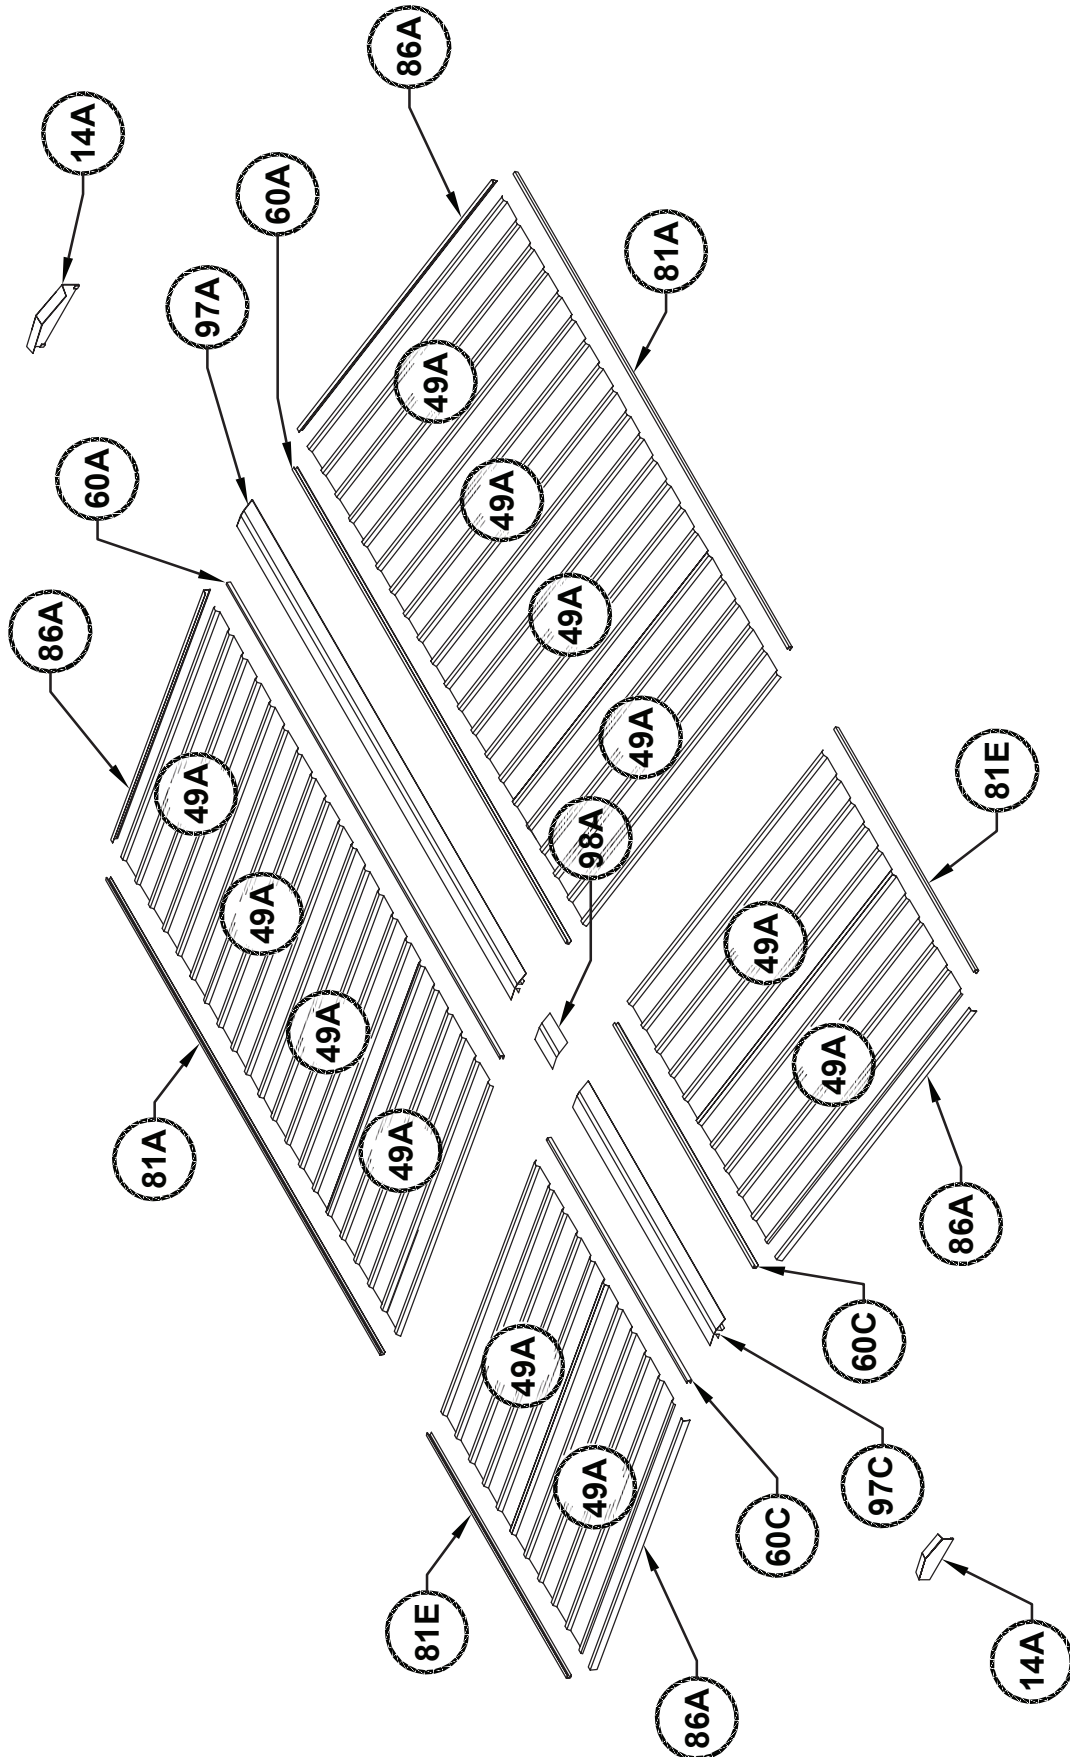


# OVERVIEW OF WALL COMPONENTS



## ROOF PANEL ASSEMBLY

LARGE PANEL - 2 required.


When completed there will be two sections with 86A lip at one end only.

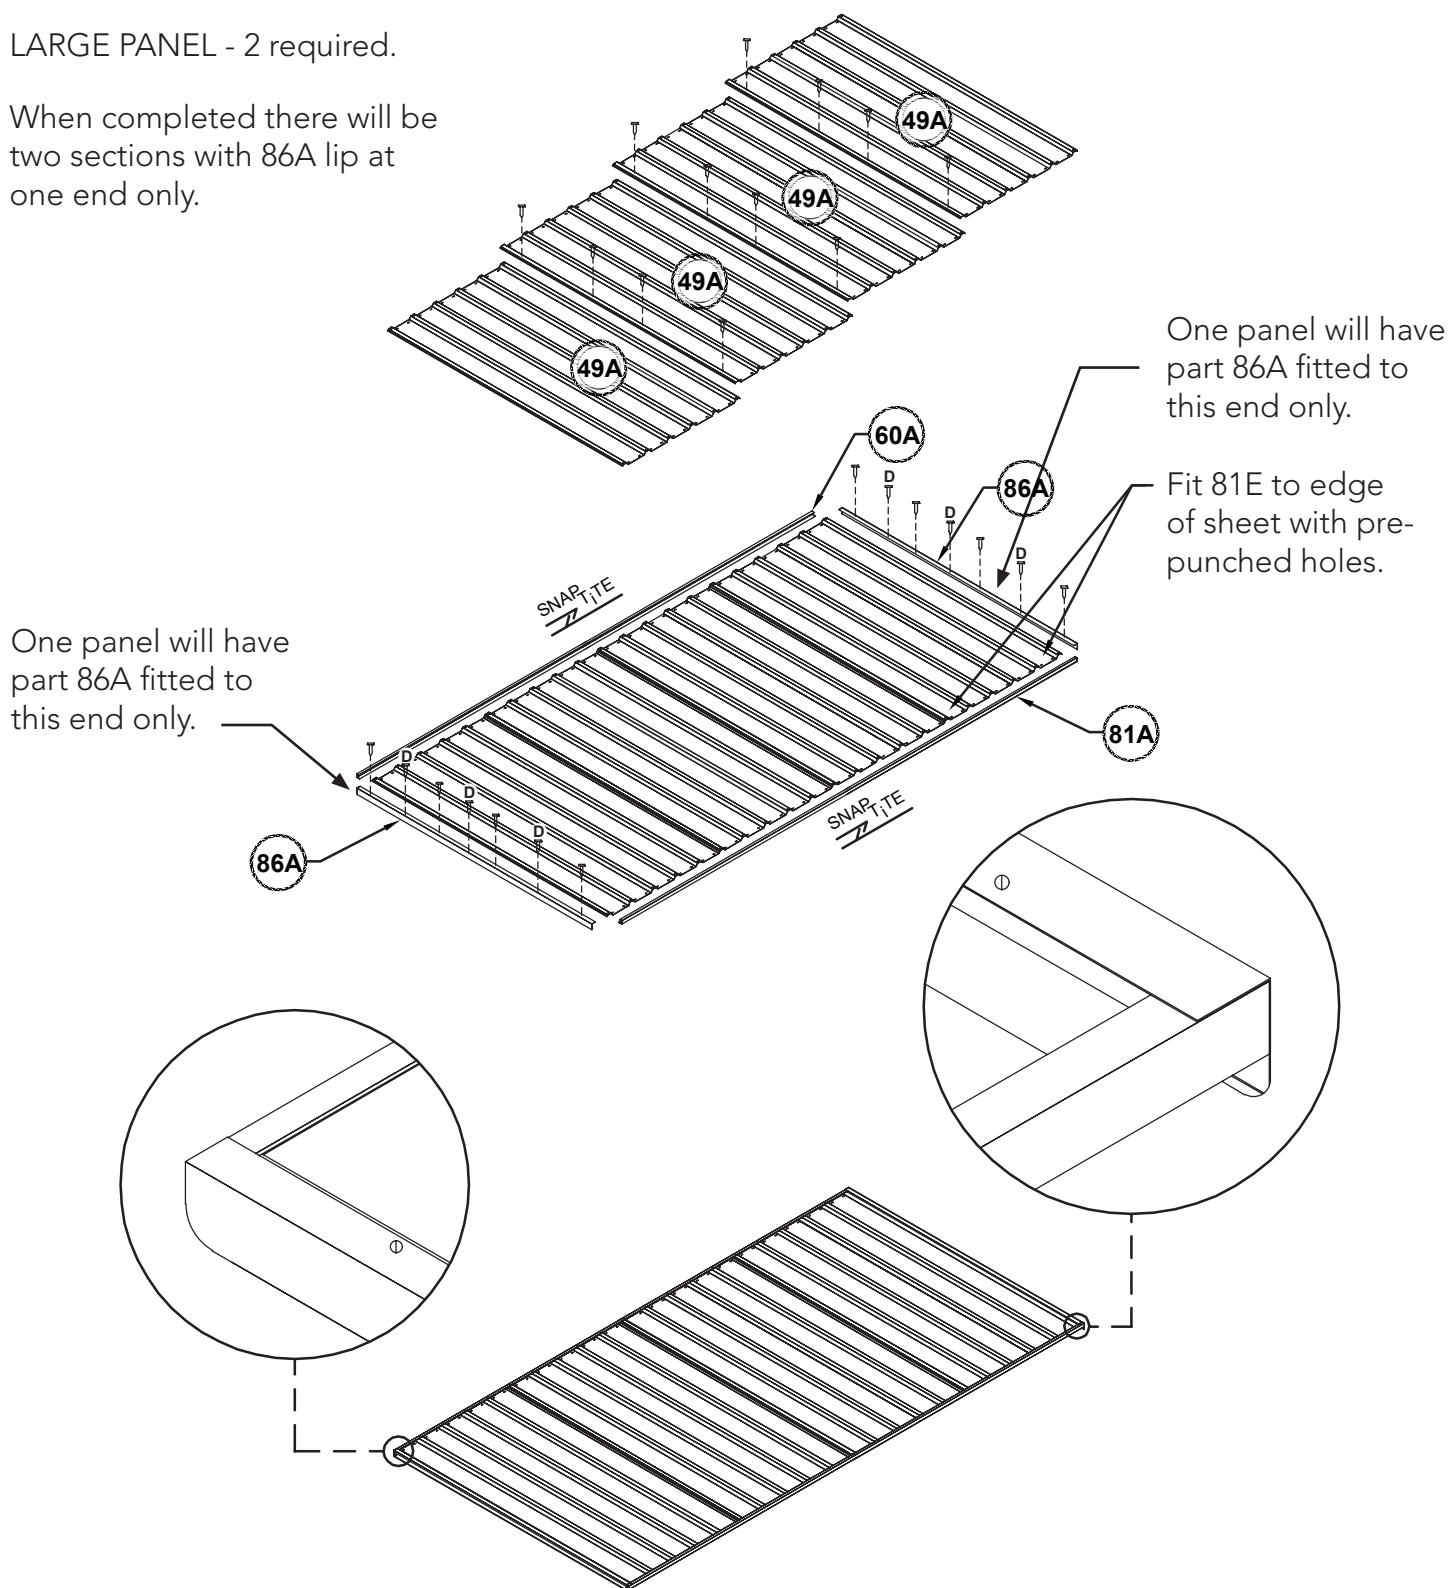

## ROOF PANEL ASSEMBLY


SMALL PANEL - 2 required.

When completed there will be two sections with 86A lip at one end only.

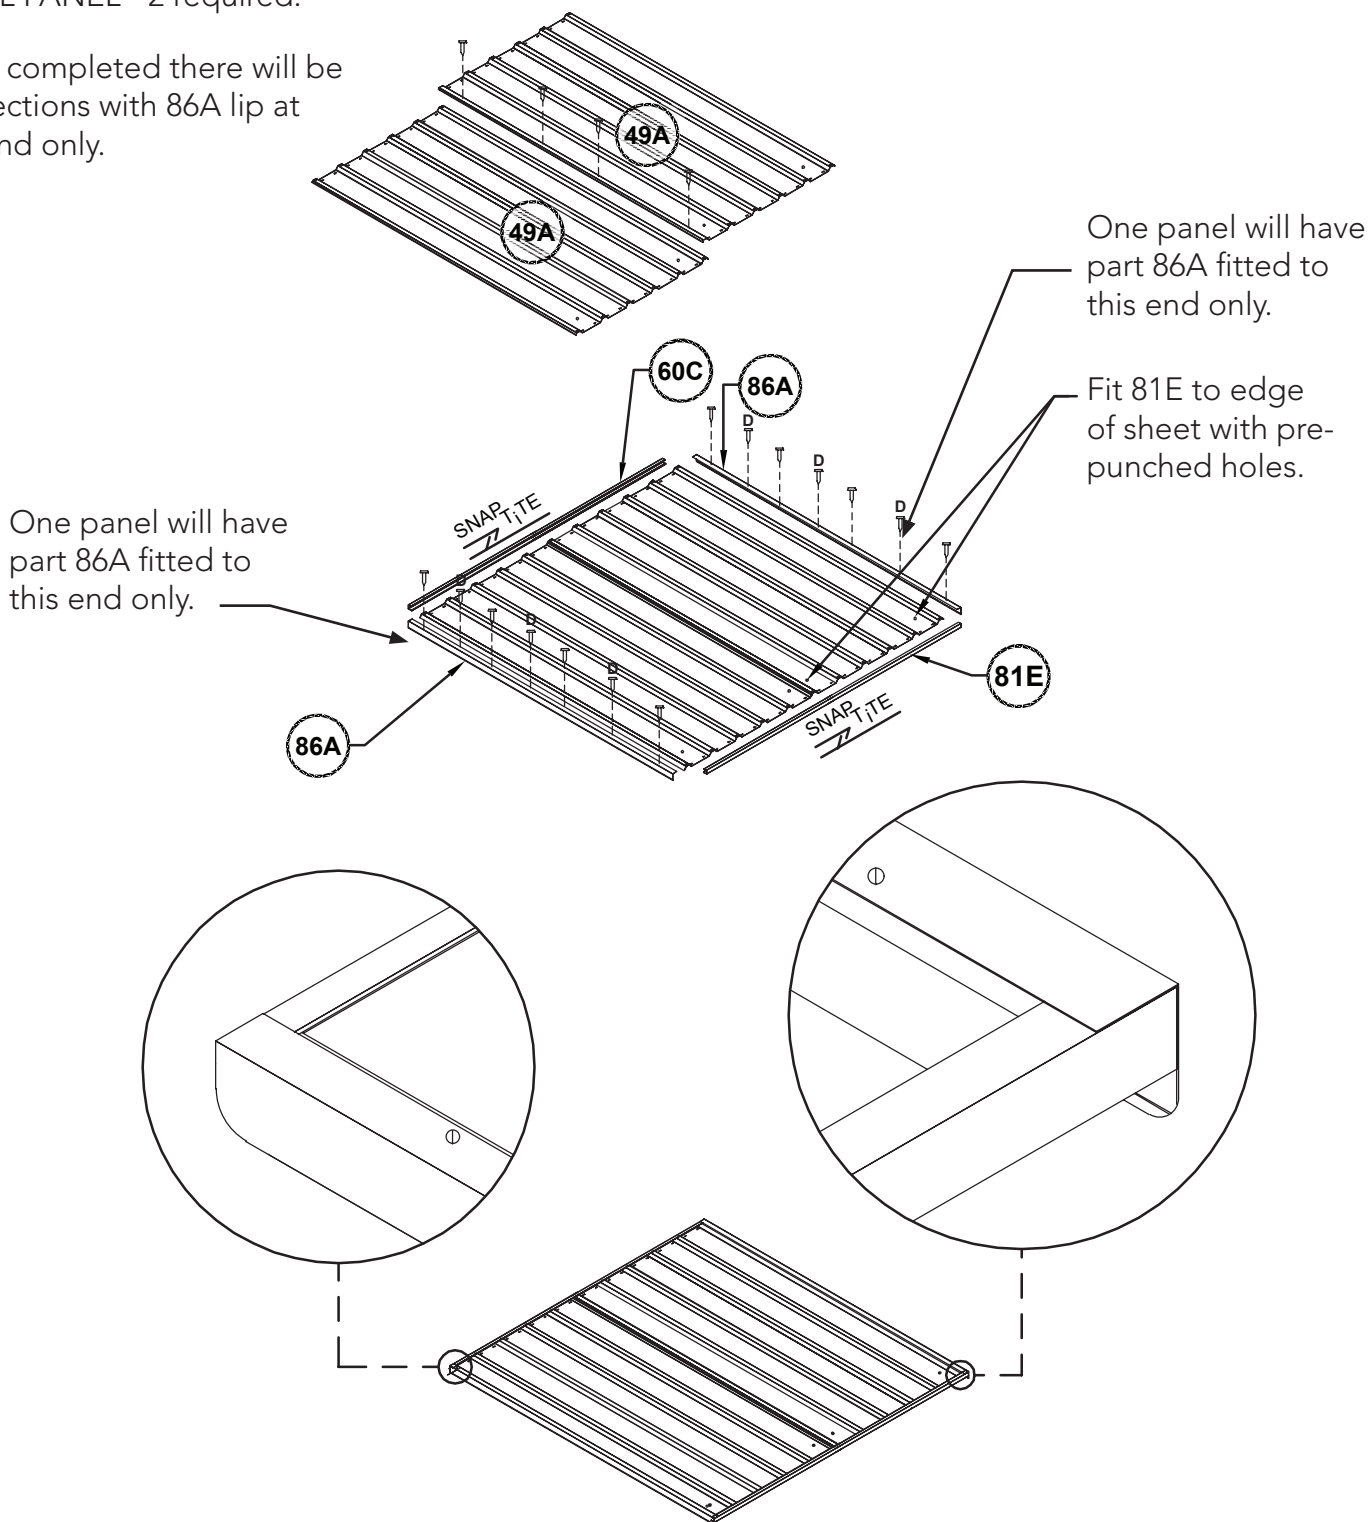


## FRONT PANEL ASSEMBLY

DOUBLE DOOR PANEL - 1 required.

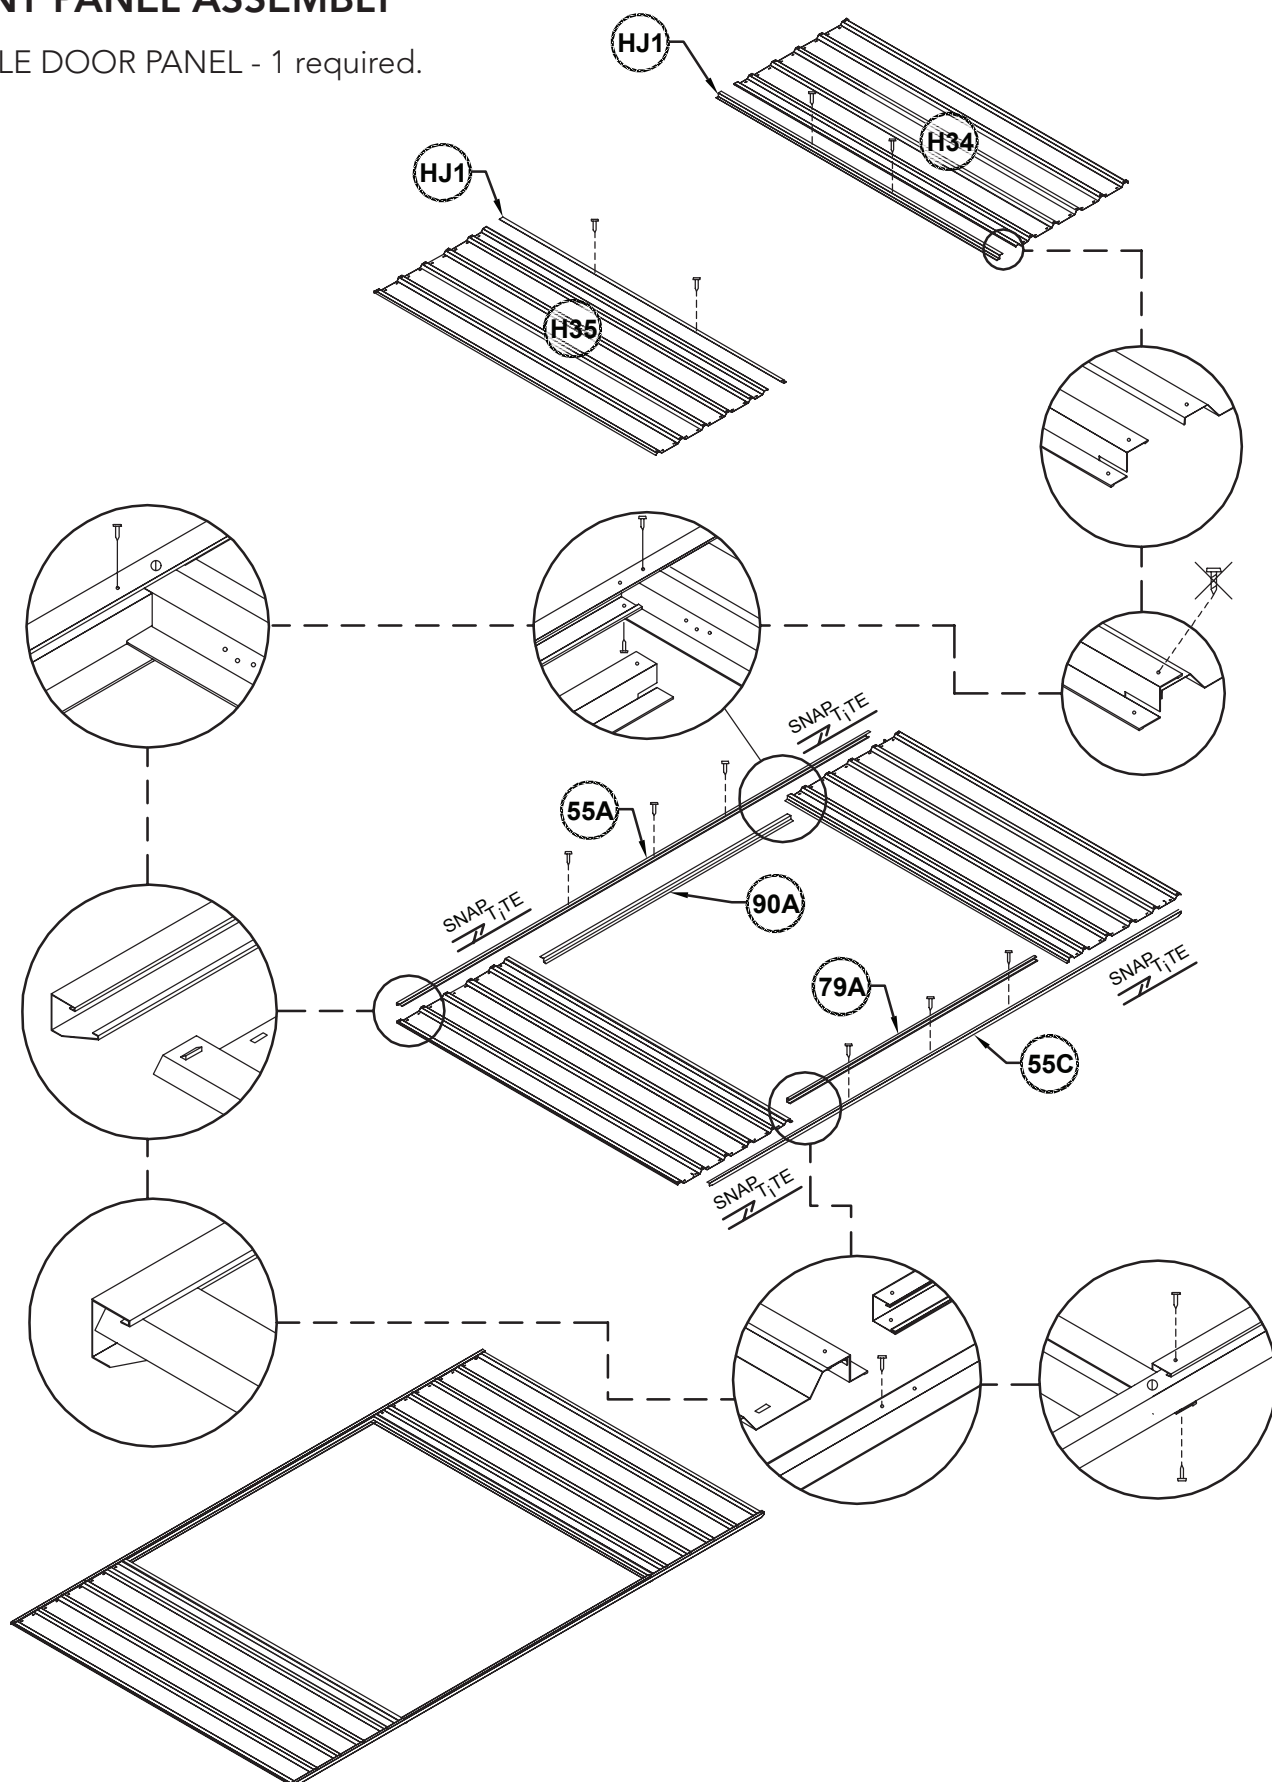




## REAR PANEL ASSEMBLY

LARGE PANEL - 1 required.

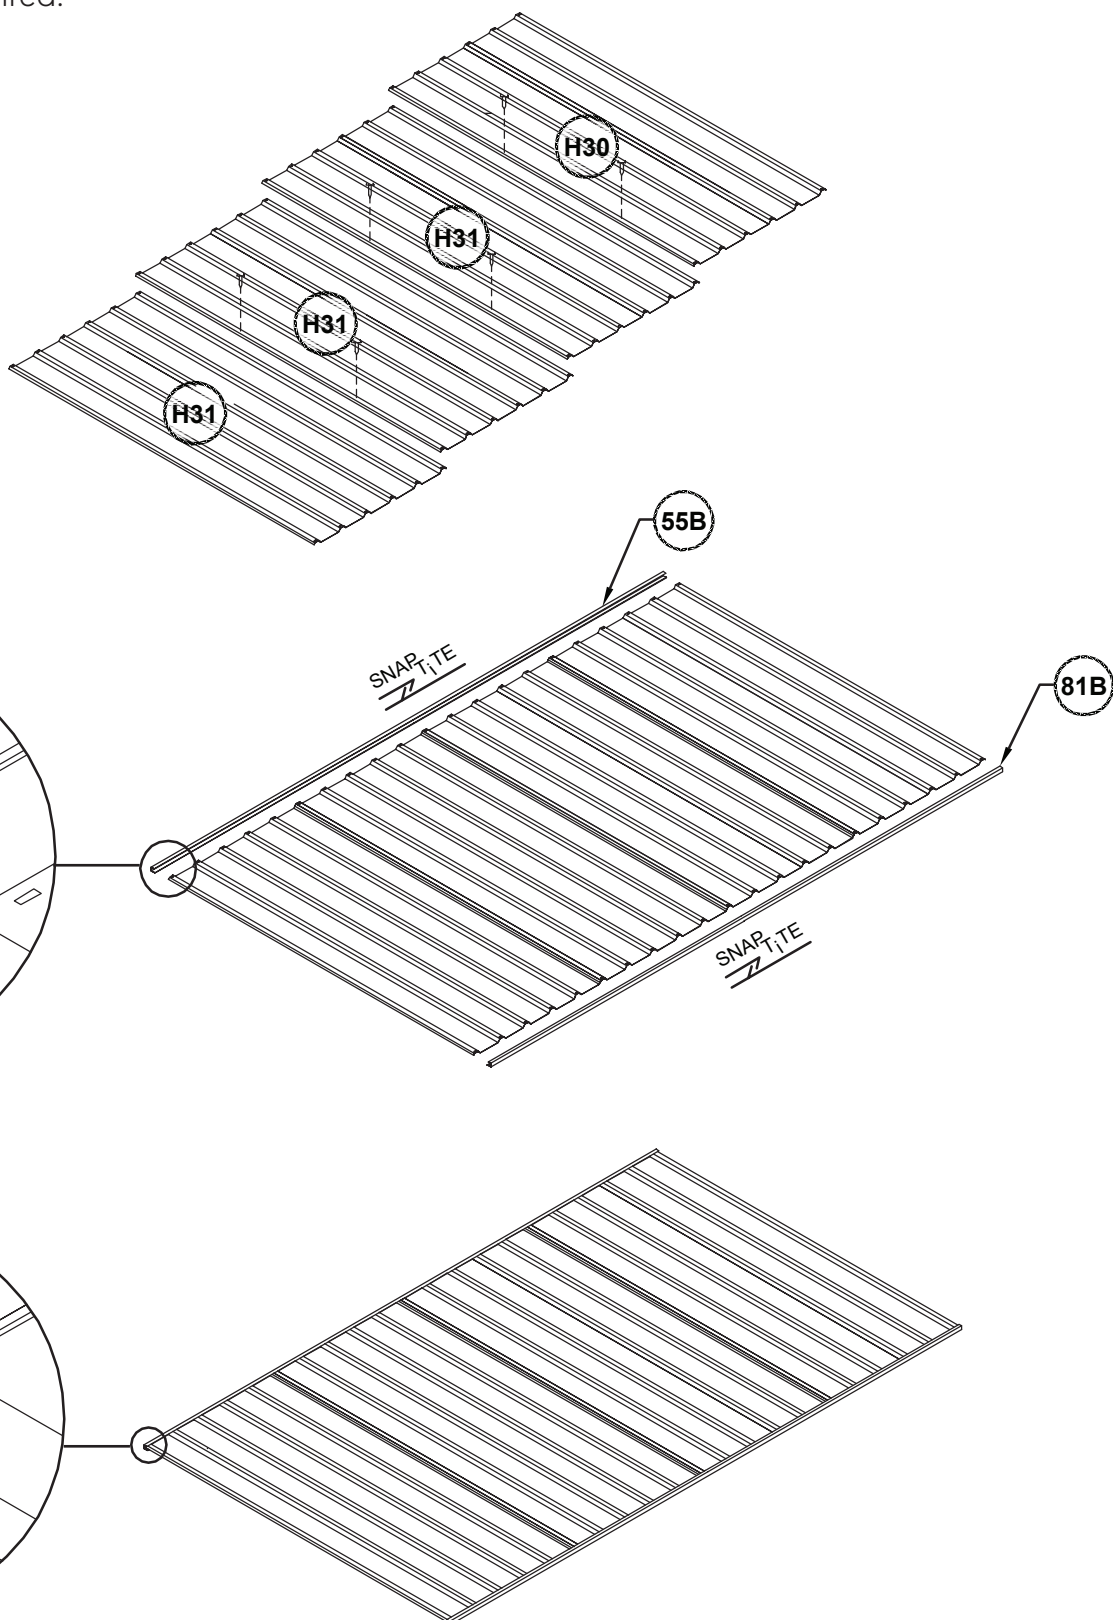



## FRONT & REAR PANEL ASSEMBLY

SMALL PANEL - 2 required.

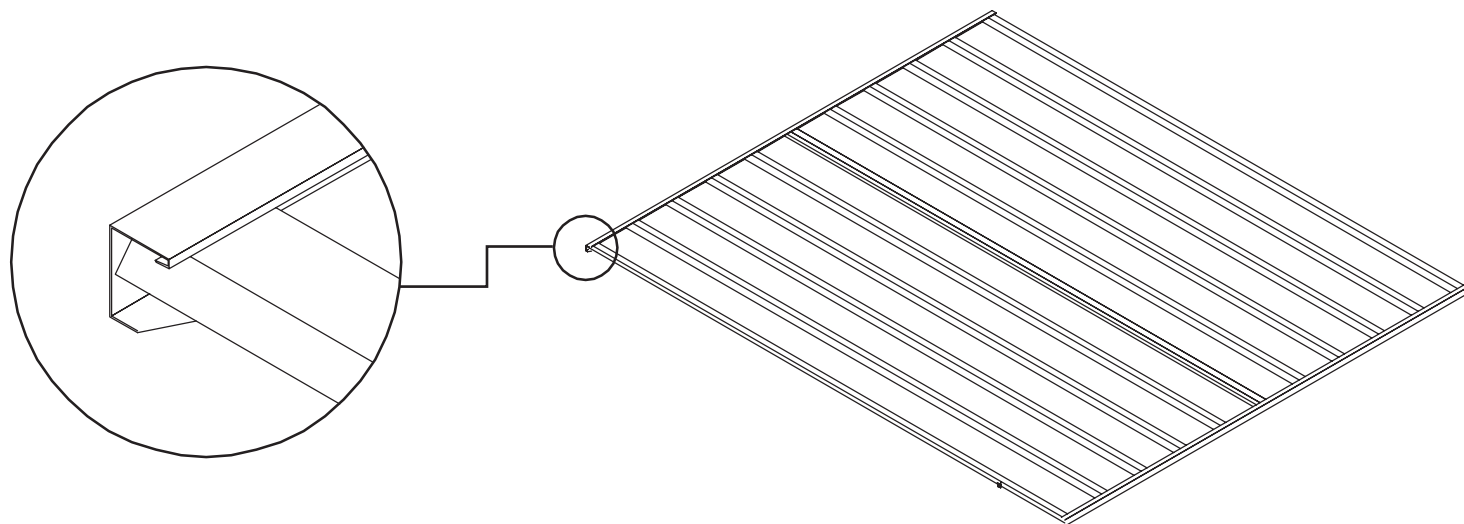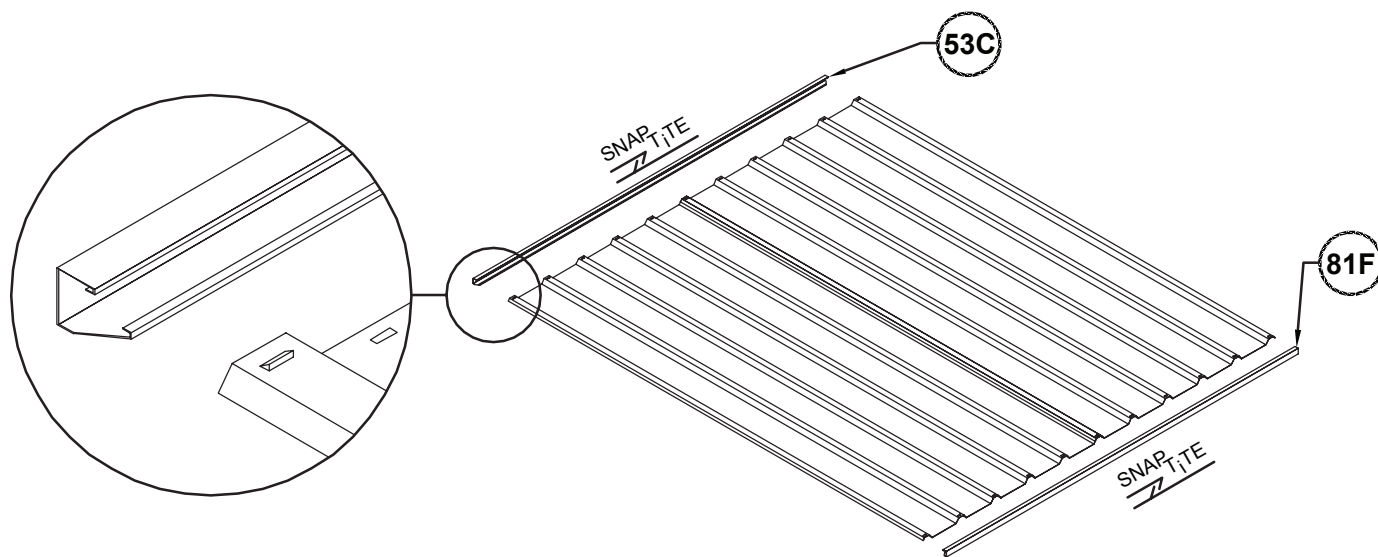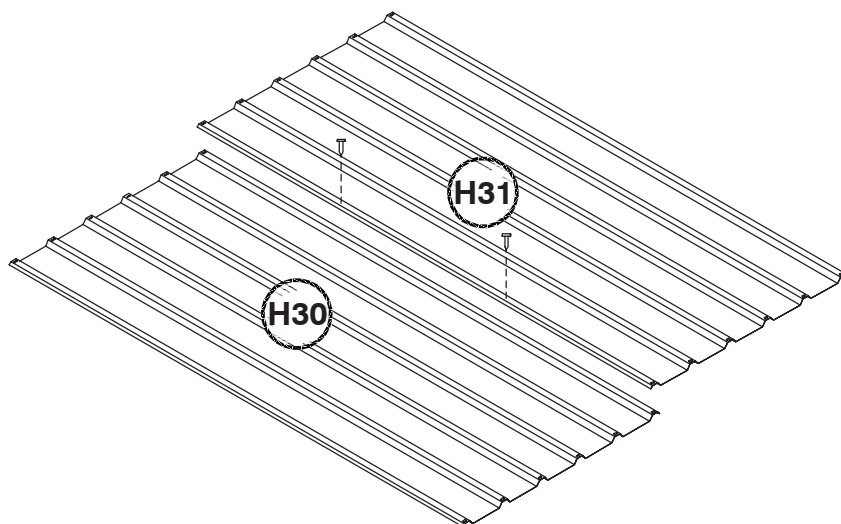

## JOINING WALL AND ROOF PANELS

To make the total span we must now join sections of sheeting together for the roof and wall.

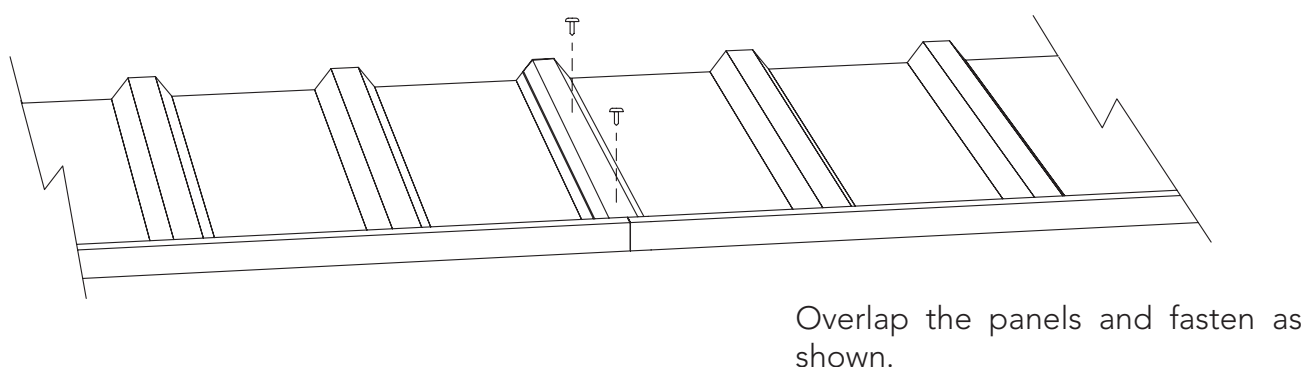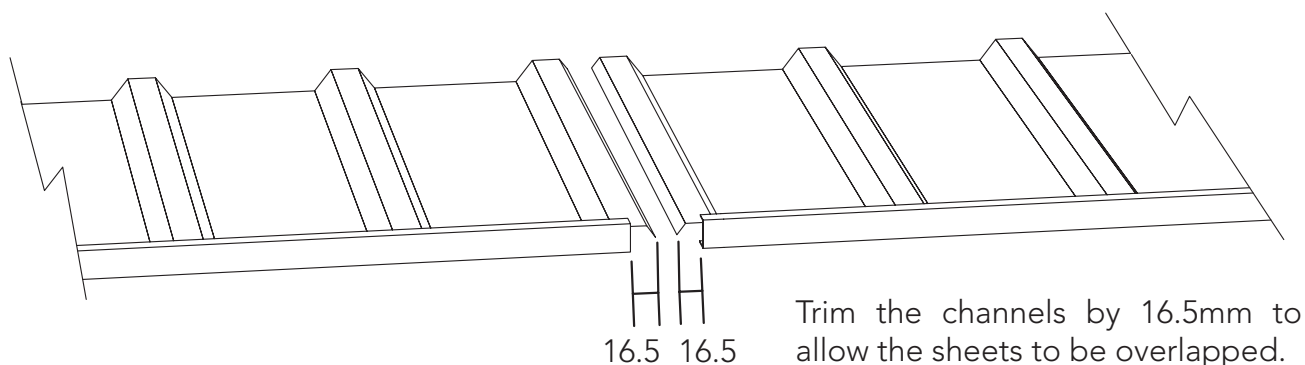

Refer to the panel construction section of this instruction set for further details and ensure that the assembled panels are not joined together with pre-punched holes incorrectly positioned.

The overall length of each panel is the same as the ridge beam.


Ridge beam and panel length	= 2253mm
Length to be cut off	= 16.5mm
New length	= 2236.5mm

Both panels joined =  $2236.5 \times 2 = 4473\text{mm}$

It is not critical that the overall dimension is exact but try and make sure the length is within 5mm.

## DOOR PANEL ASSEMBLY DOUBLE DOOR

1 required.


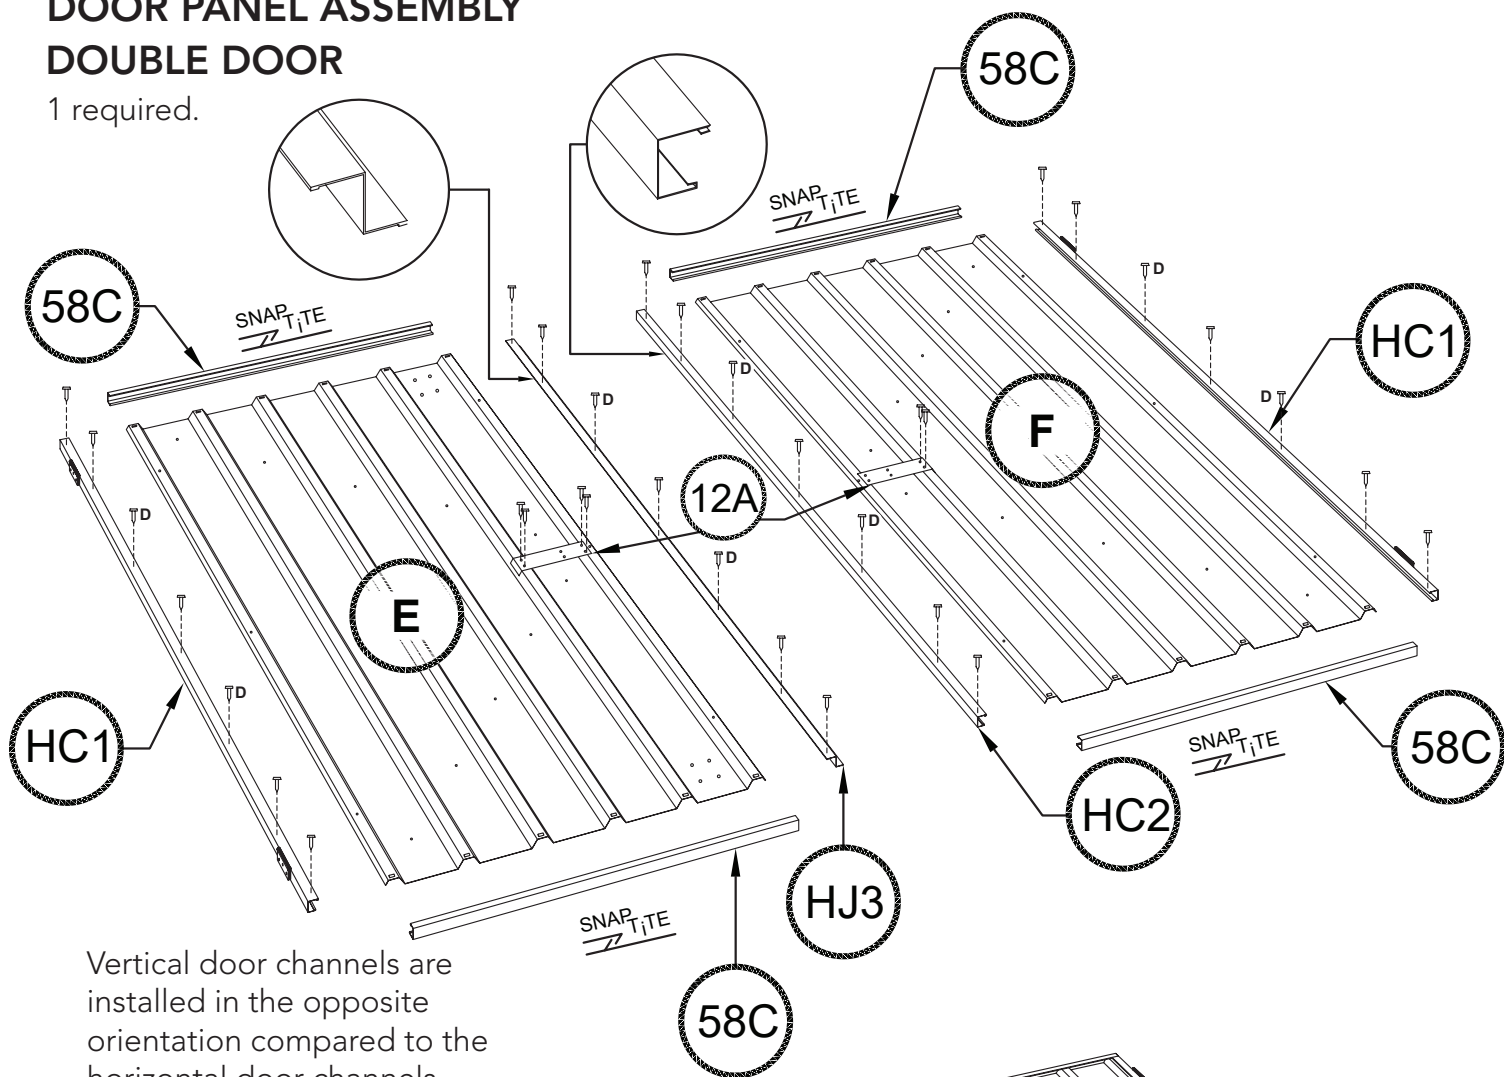


Vertical door channels are installed in the opposite orientation compared to the horizontal door channels.




Long flange of channel

Short flange of channel

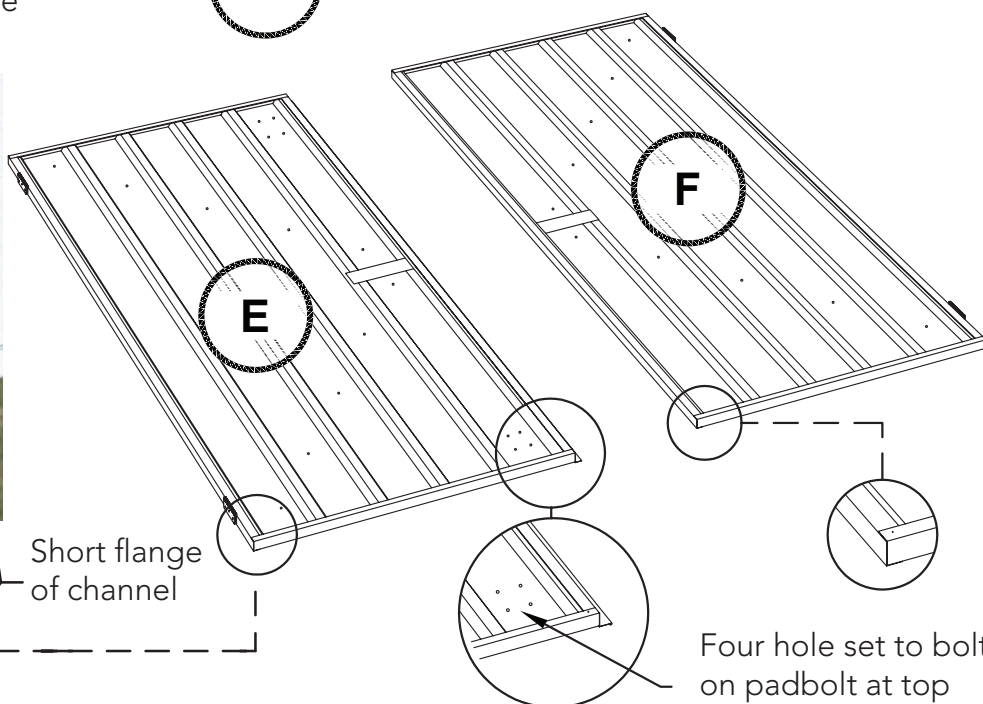

Four hole set to bolt on padbolt at top and bottom of door.

## DOOR PANEL ASSEMBLY

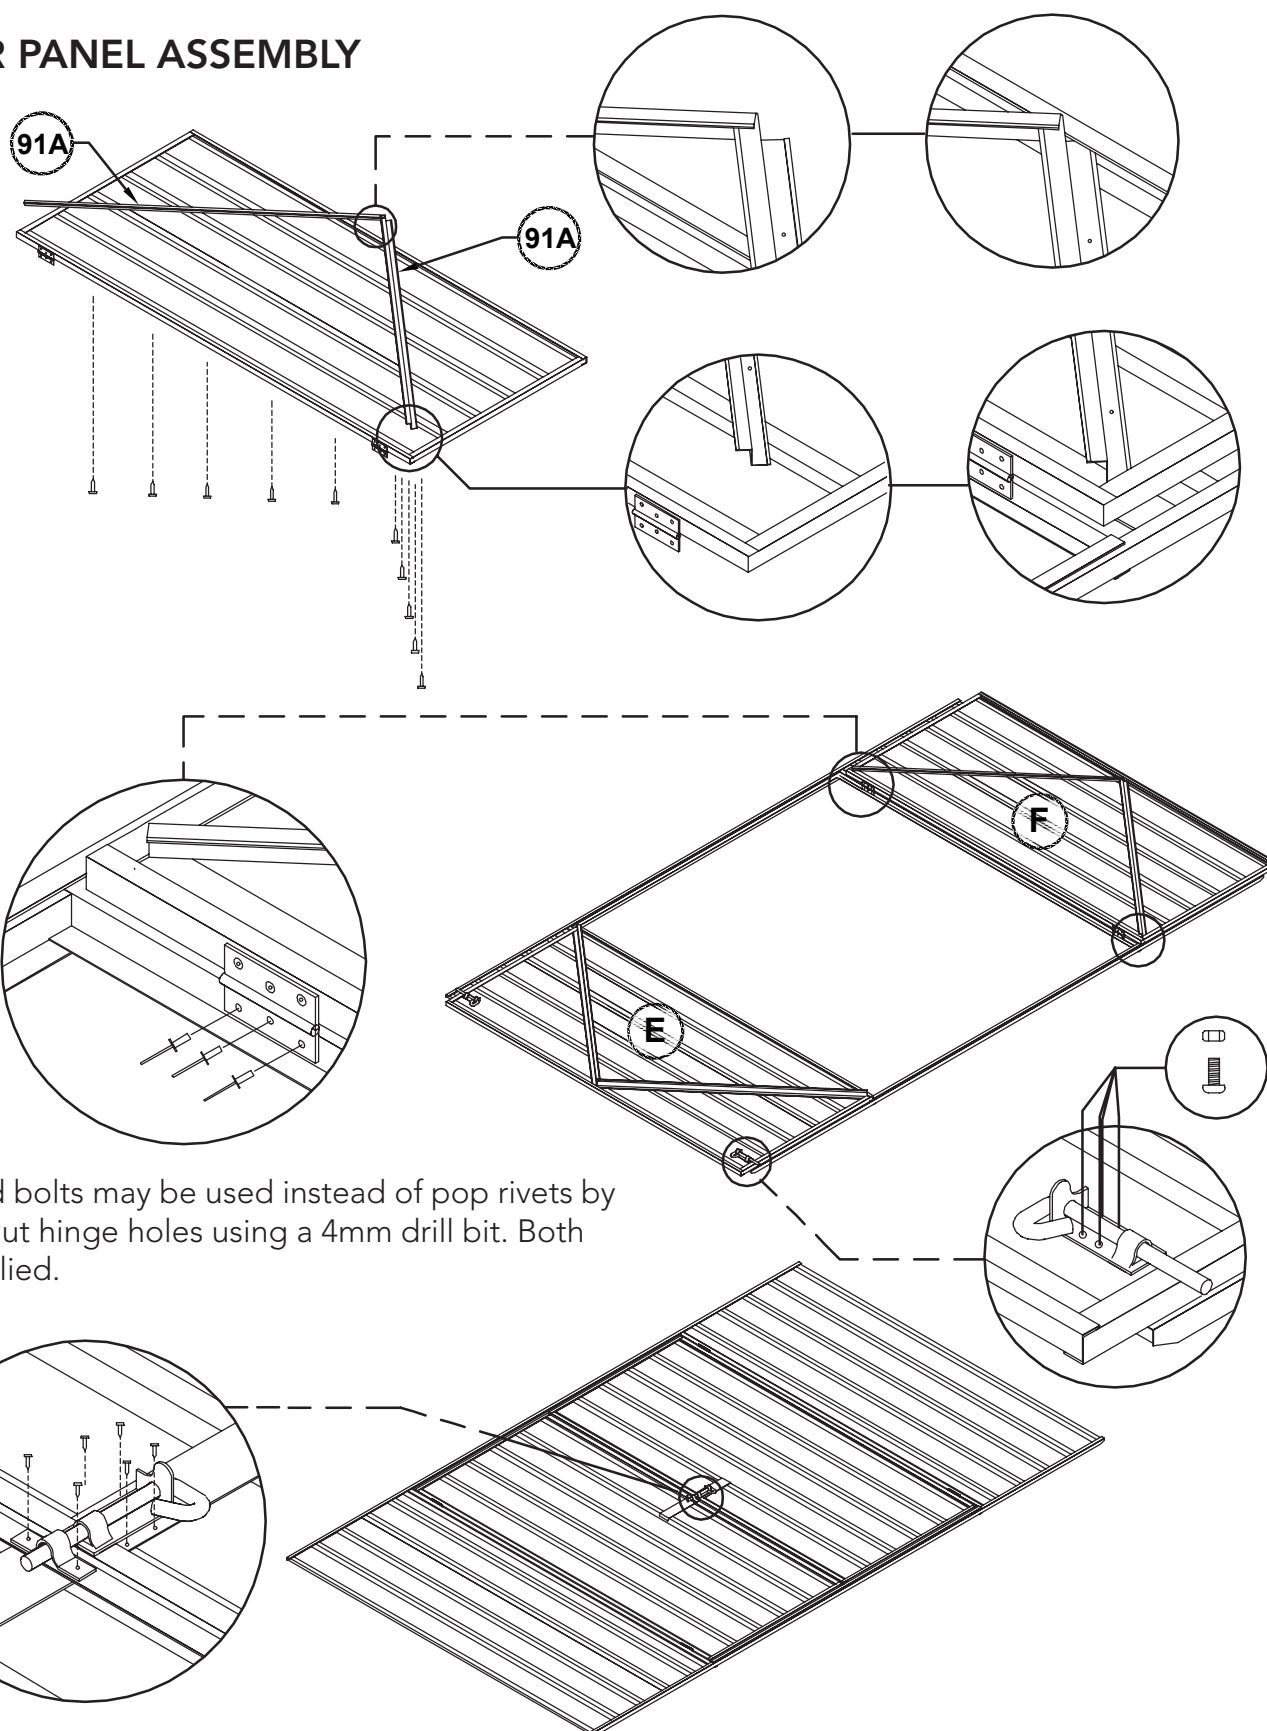


Nuts and bolts may be used instead of pop rivets by drilling out hinge holes using a 4mm drill bit. Both are supplied.

The two holes required to connect the padbolt hasp for each door have not been pre-punched, to allow for proper alignment, position each hasp centrally over the padbolt shaft and drill 3mm holes and secure with screws.


## SIDE PANEL ASSEMBLY

2 required.

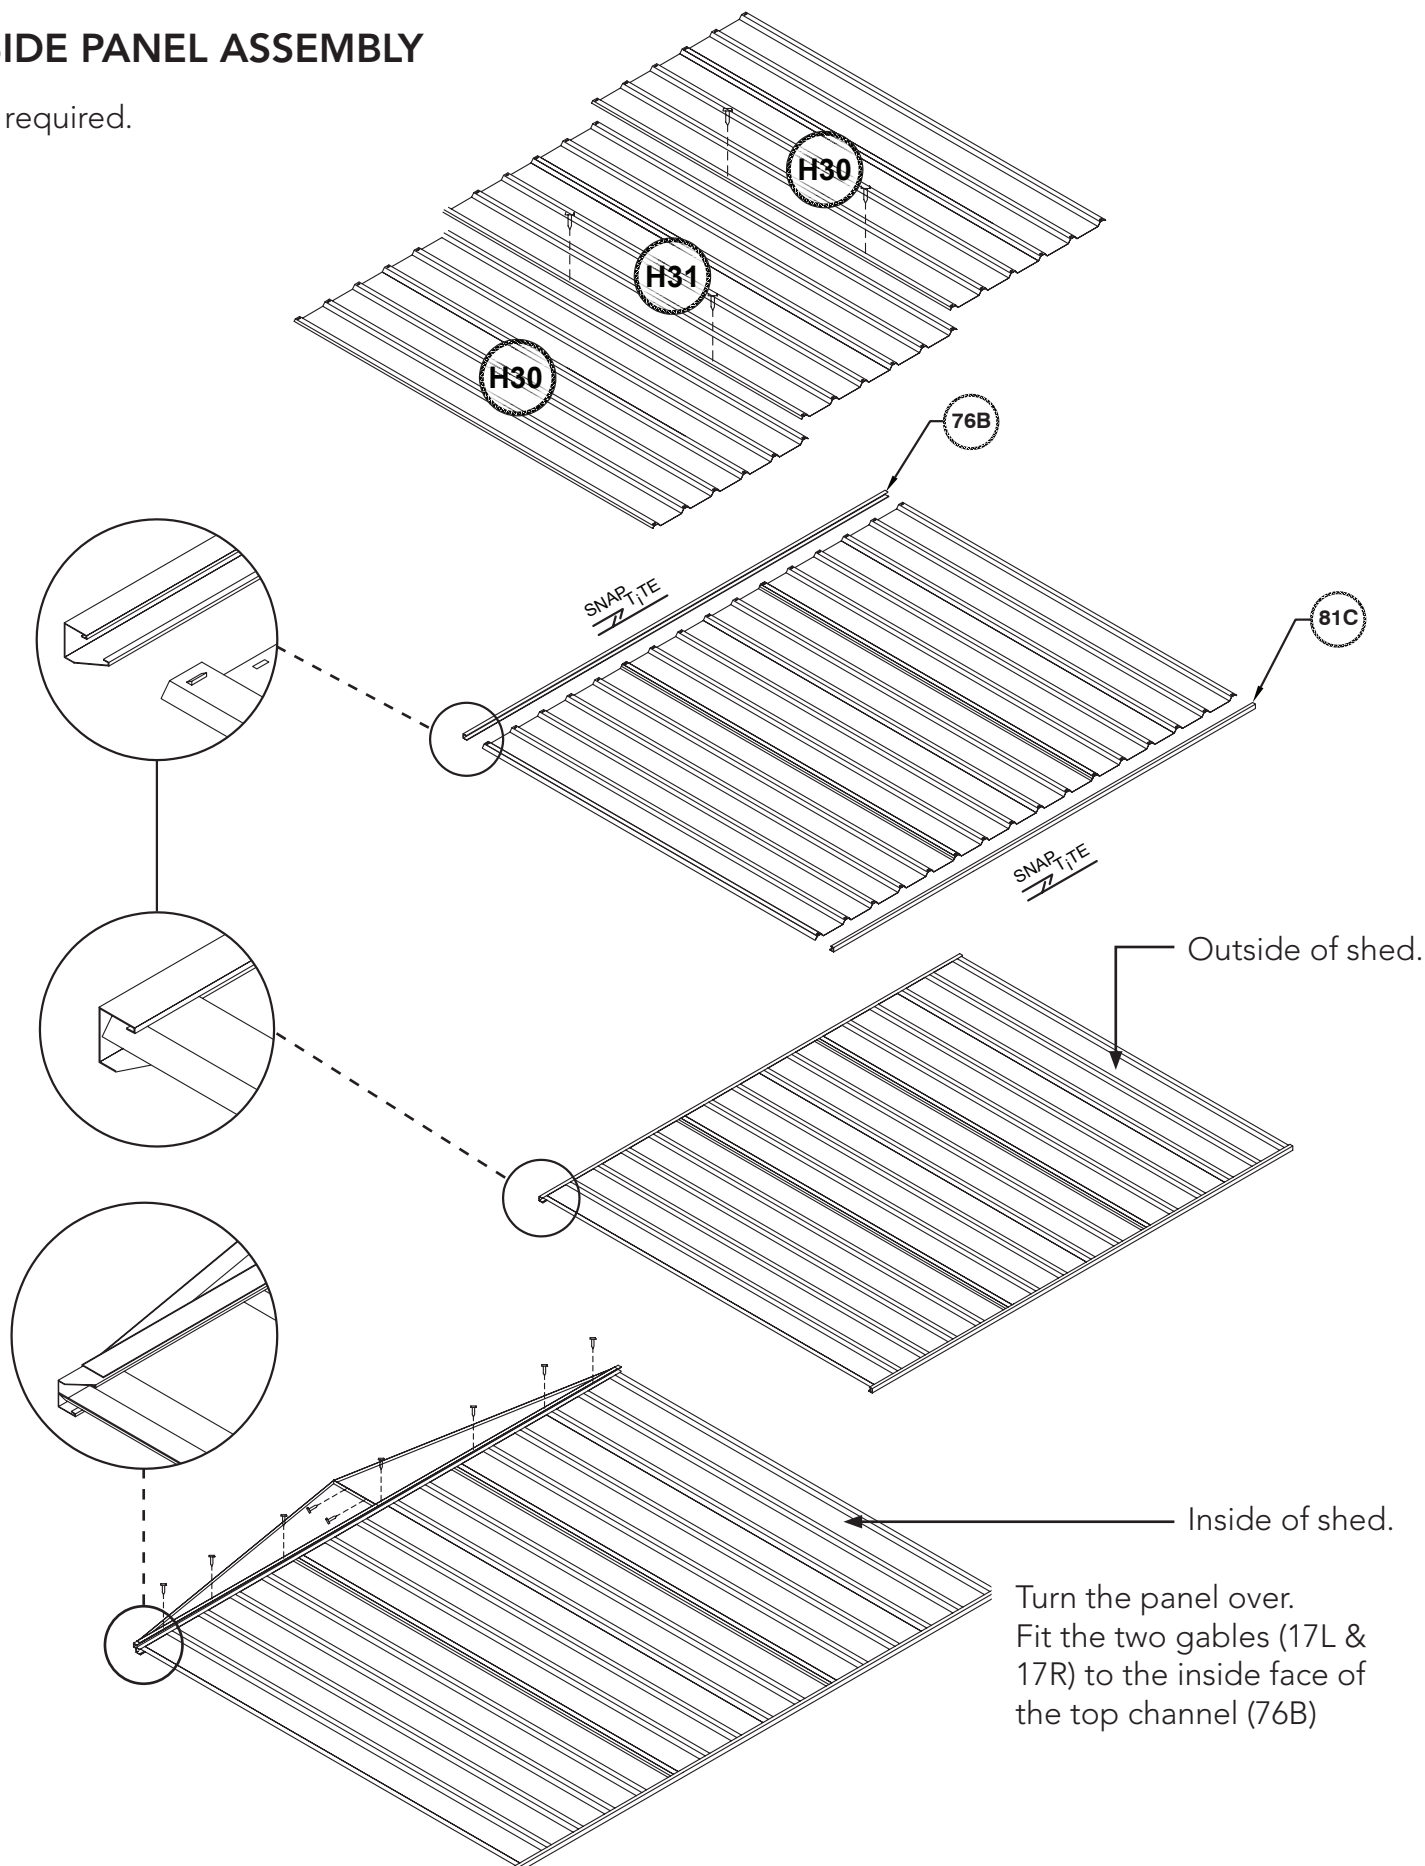


## HIGH PORTAL FRAME DETAILS

2 required.

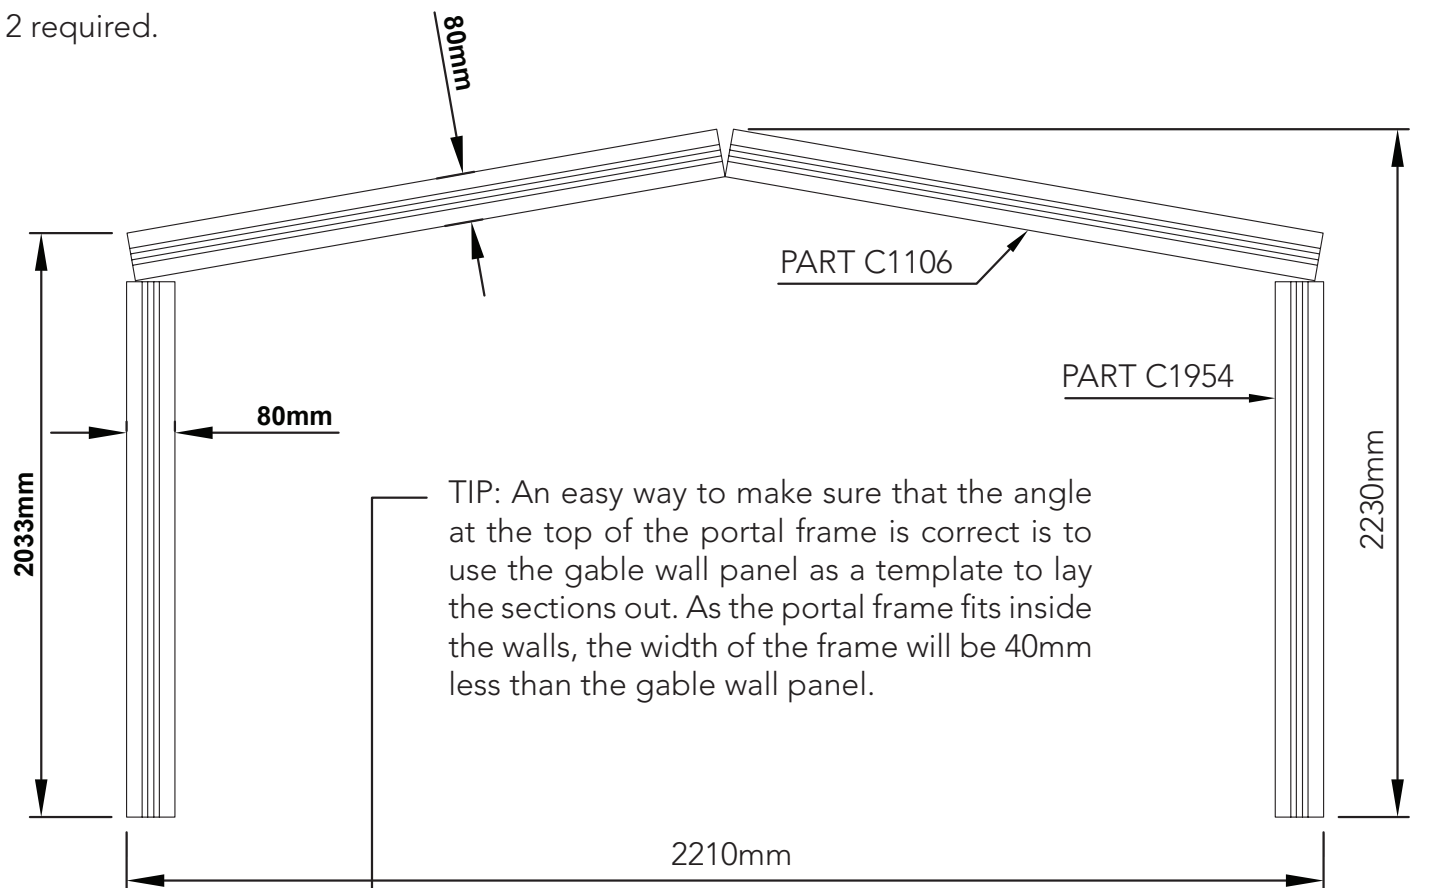


NOTE: Refer to the section HIGH CENTRE PORTAL ASSEMBLY for photos of the process.

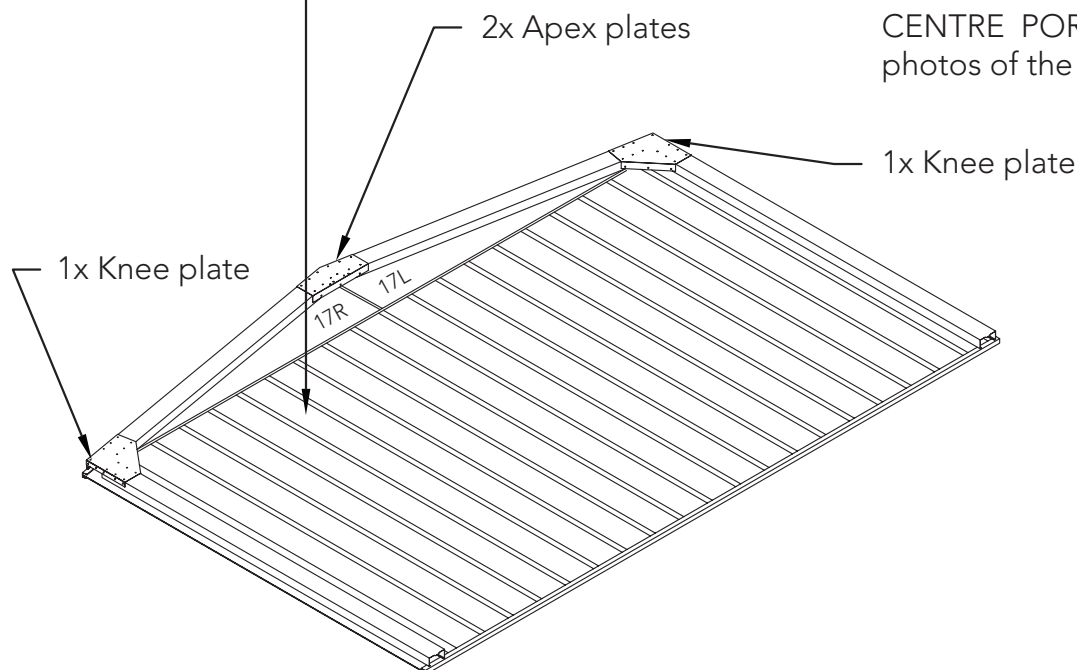

NOTE: If you have a slab with an edge rebate in your concrete slab, you will have to cut an amount off the bottom of the frame legs equal to the depth of the rebate.

## HIGH PORTAL FRAME ASSEMBLY

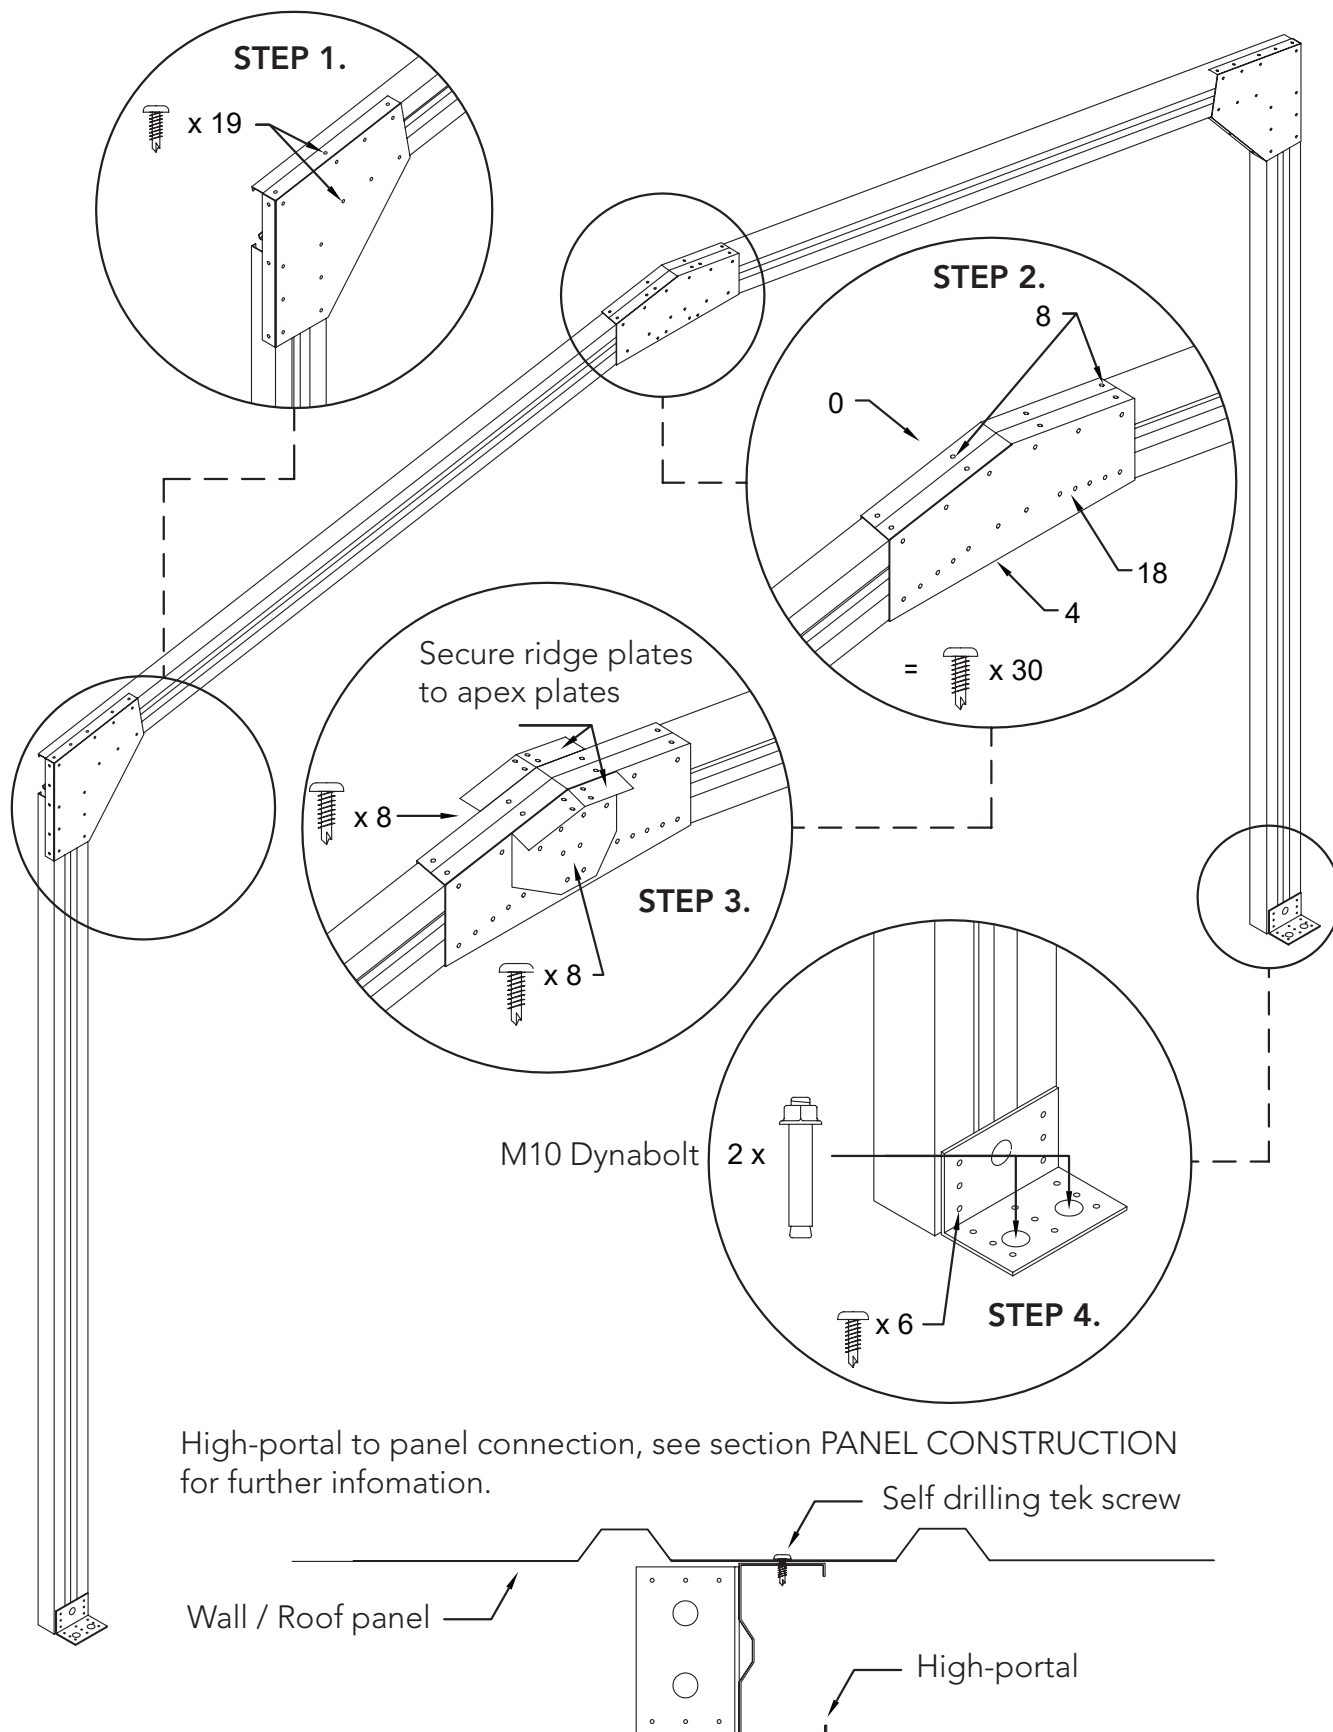


## HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS


### STEP 1.

Draw pattern on the concrete in accordance with the dimensions detailed in the assembly instructions.


#### Step 1a

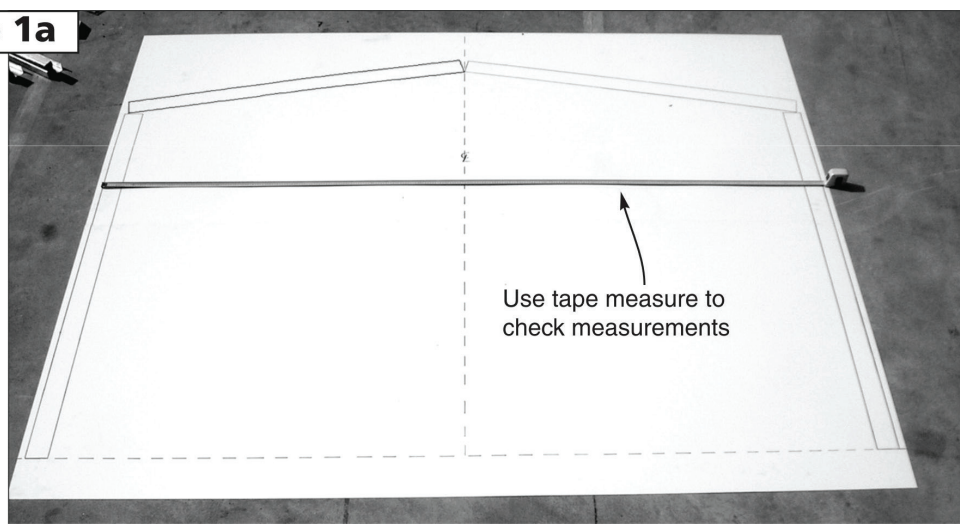

#### Step 1b

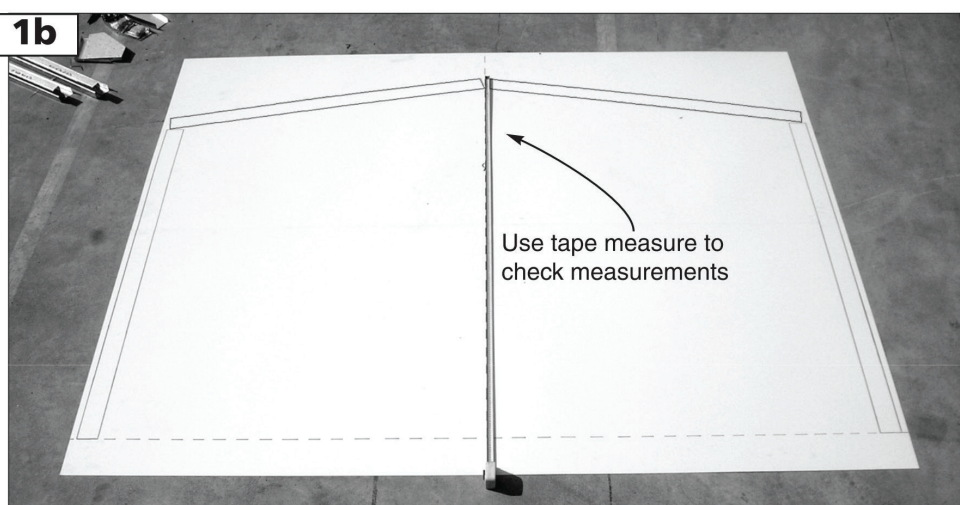

#### Step 1c

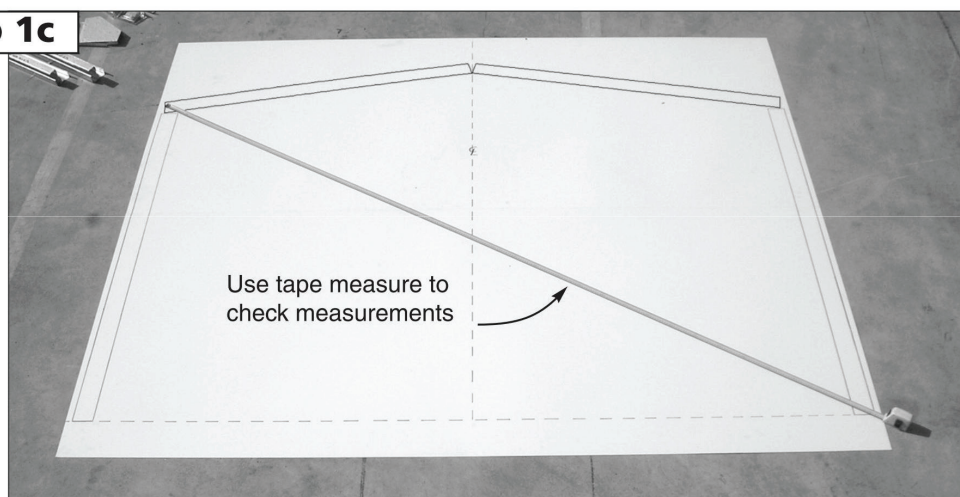


## HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS


### STEP 2.

Understand where components are to be positioned


#### Step 2a

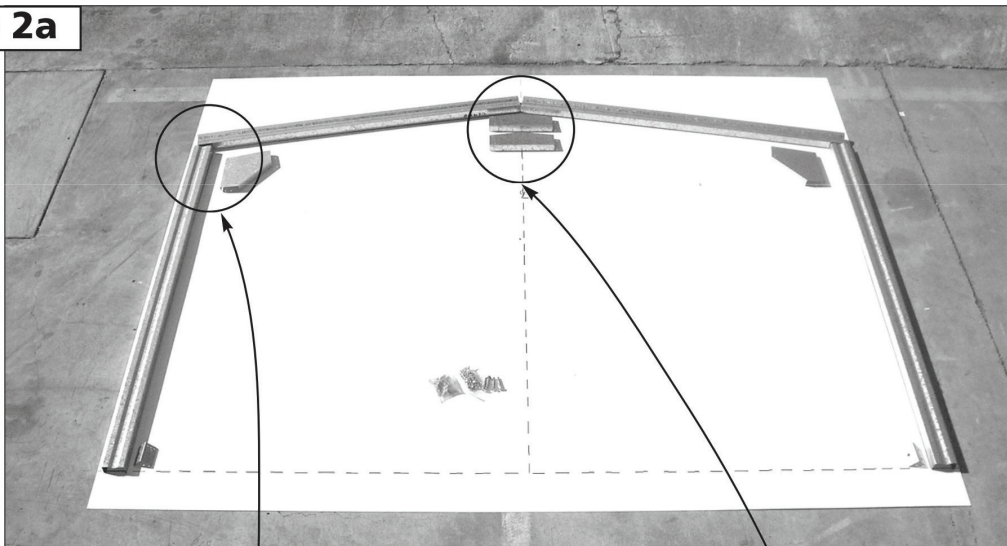

#### Step 2b

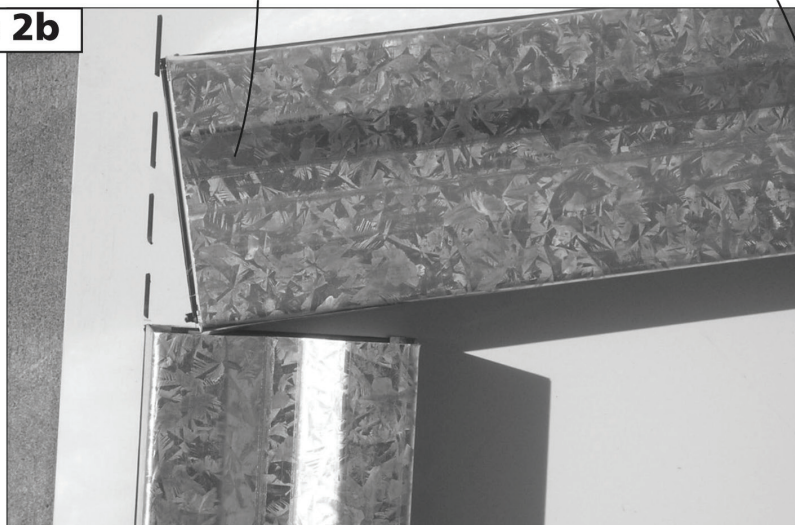

#### Step

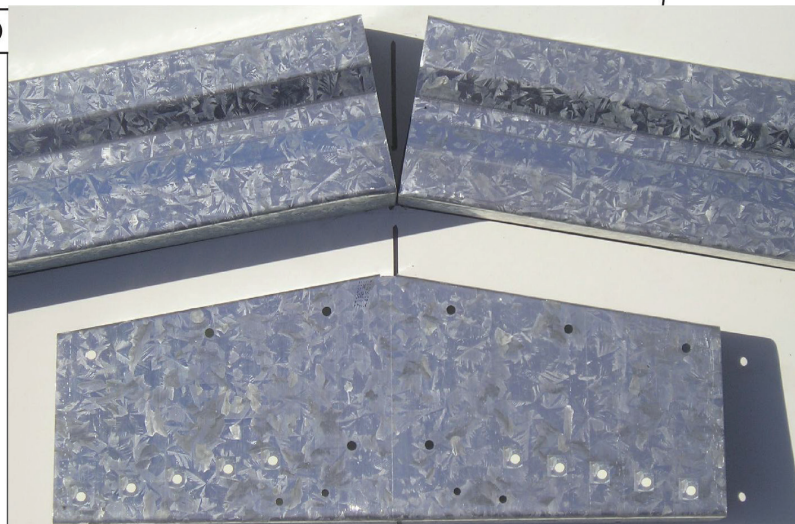

## HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS


### STEP 3.

Join C1482 to C1954


**Step 3a**



**Step 3b**

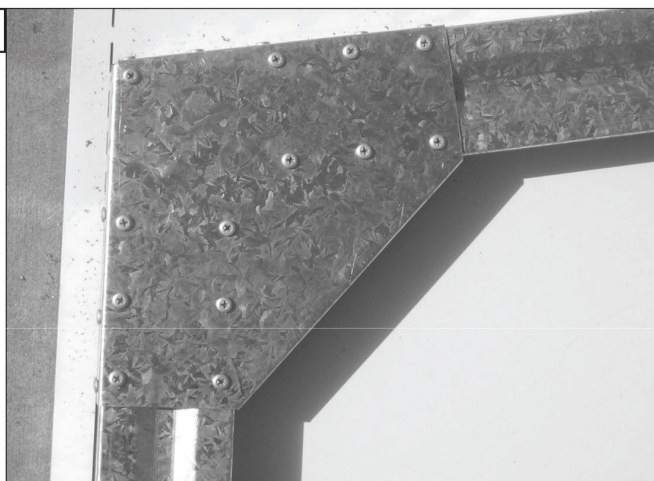

**Step 3c**

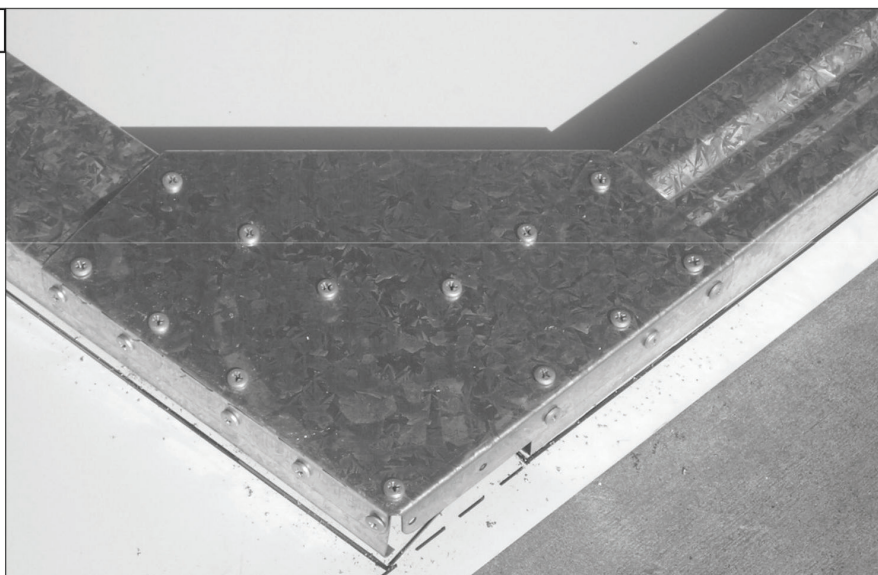


## HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS


### STEP 4.

Join C1482 to C1482


**Step 4a**

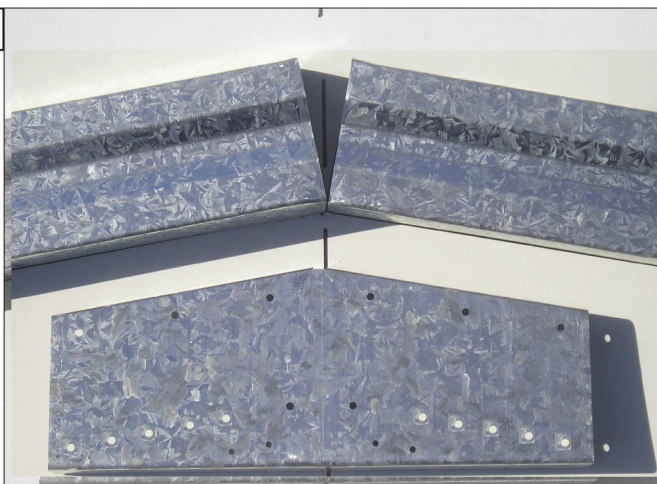

**Step 4b**

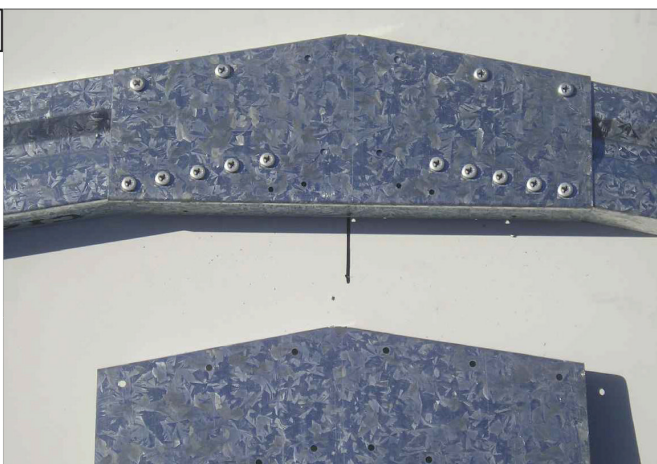

**Step 4c**

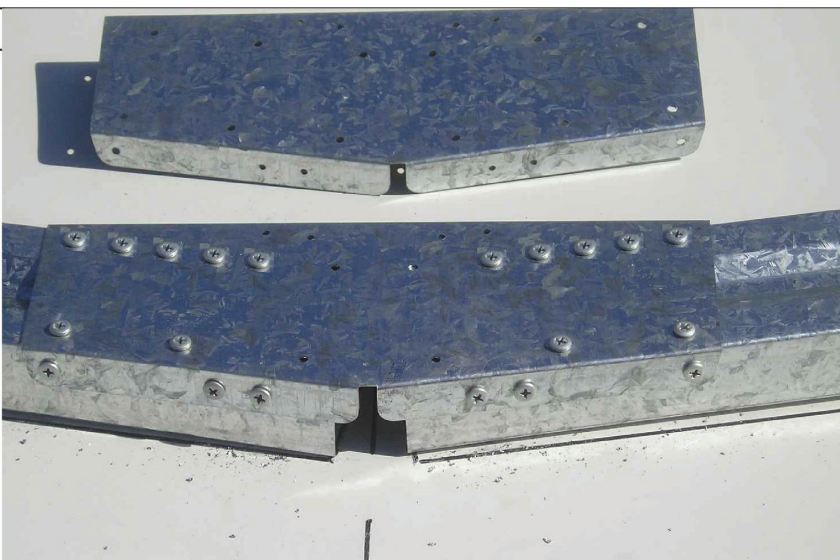

## HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS

### STEP 5.



Secure ridge plate (RBP)



## HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS

### STEP 6.




Secure multi purpose brackets

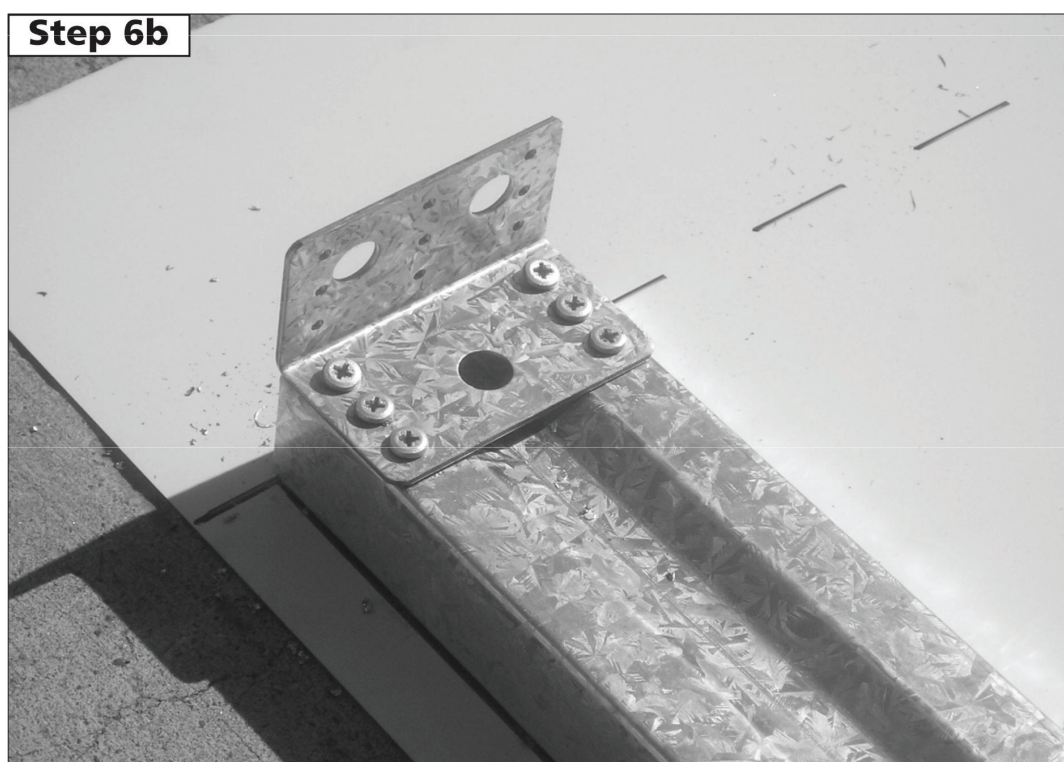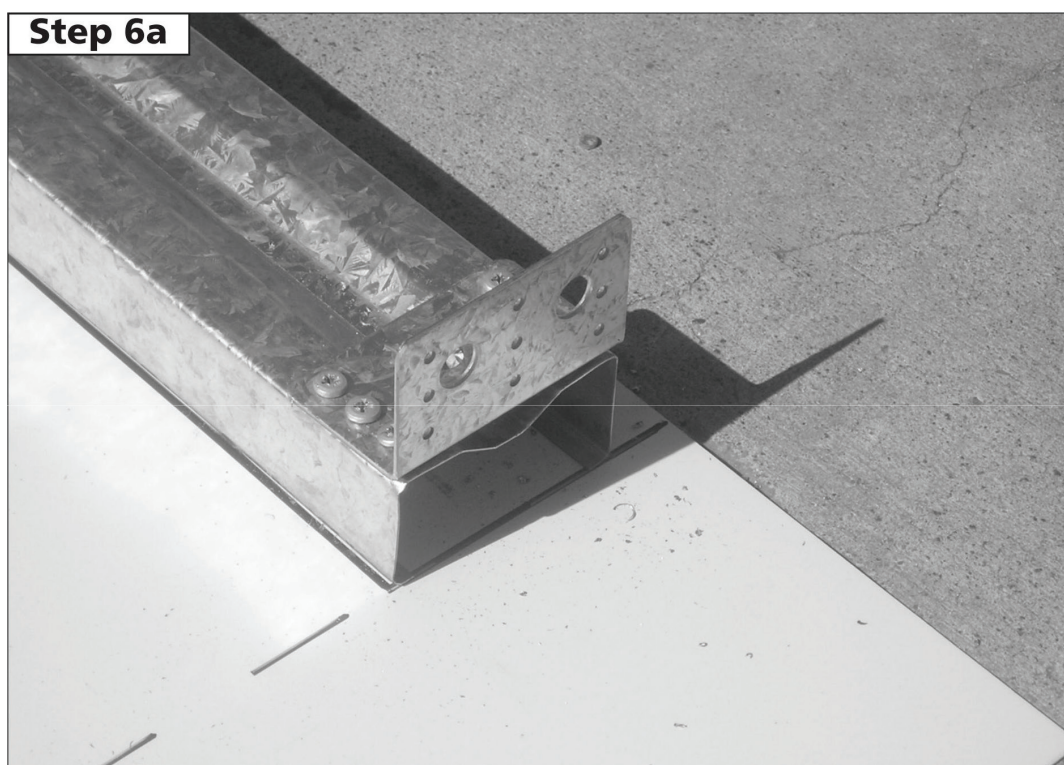

## HIGH CENTRE PORTAL ASSEMBLY SUPPORT PHOTOS

### STEP 7.

Turn frame over and repeat steps 4 and 5.

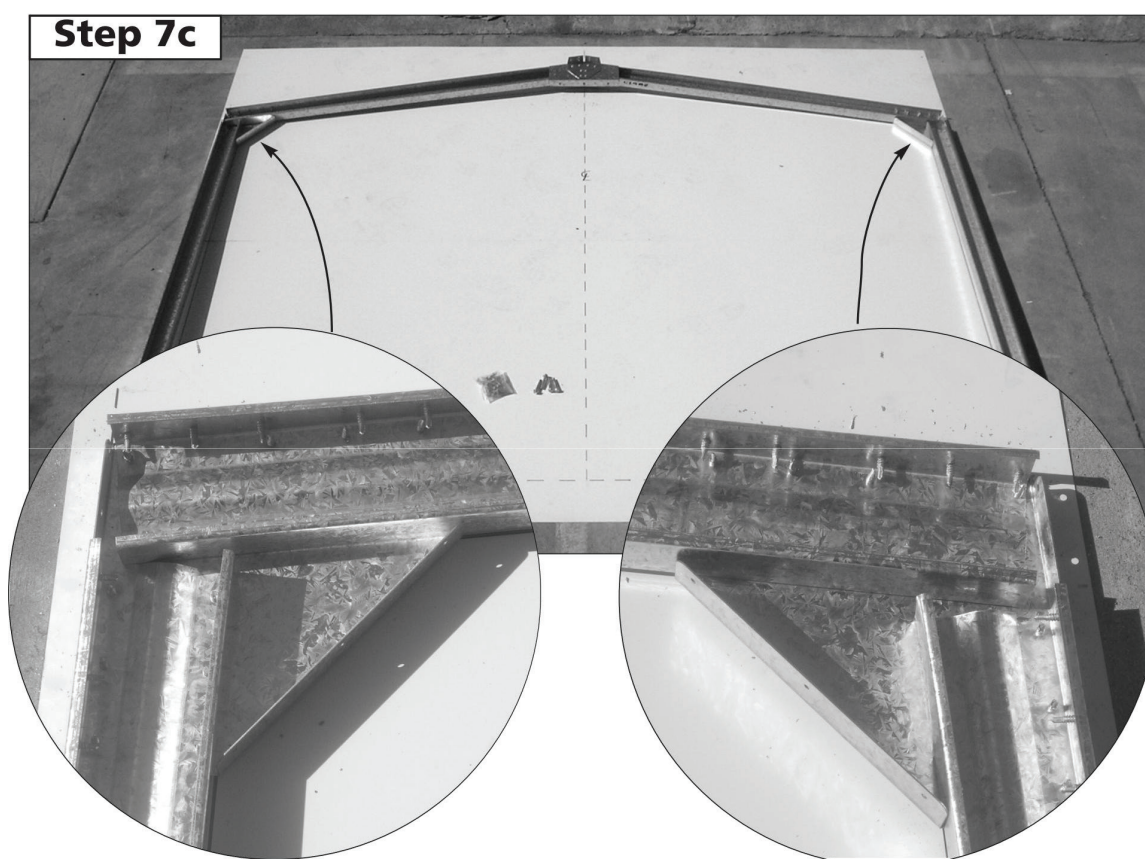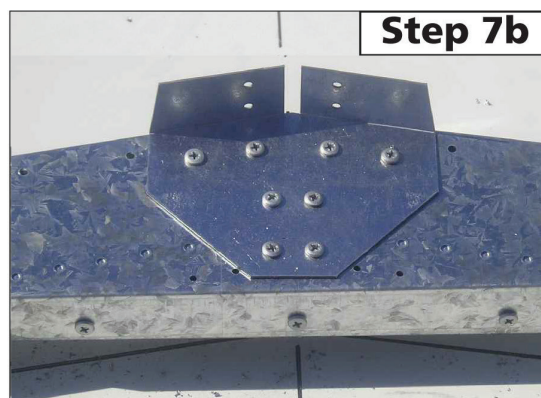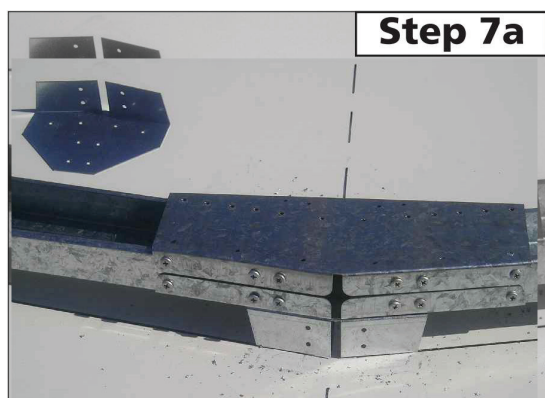



## HIGH PORTAL FRAME DETAILS

Recommended slab dimensions - 4580mm x 2360mm

External wall dimensions - 4480mm x 2260mm

Internal wall dimensions - 4440mm x 2220mm


FIG 8A

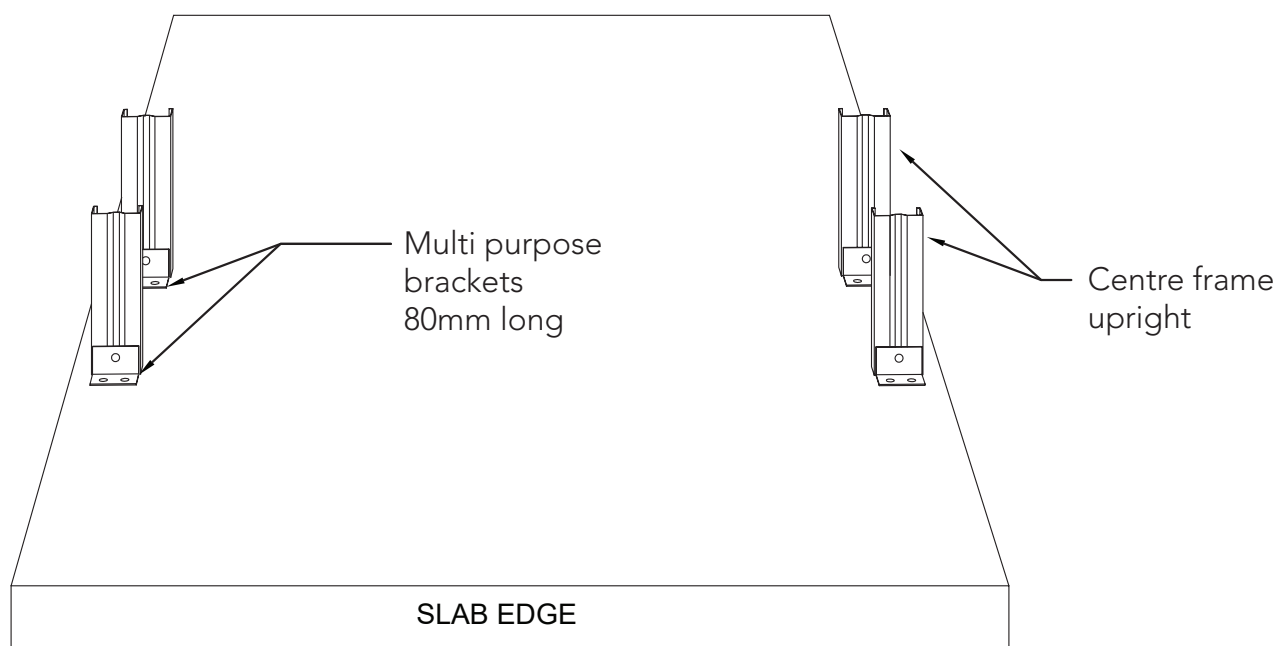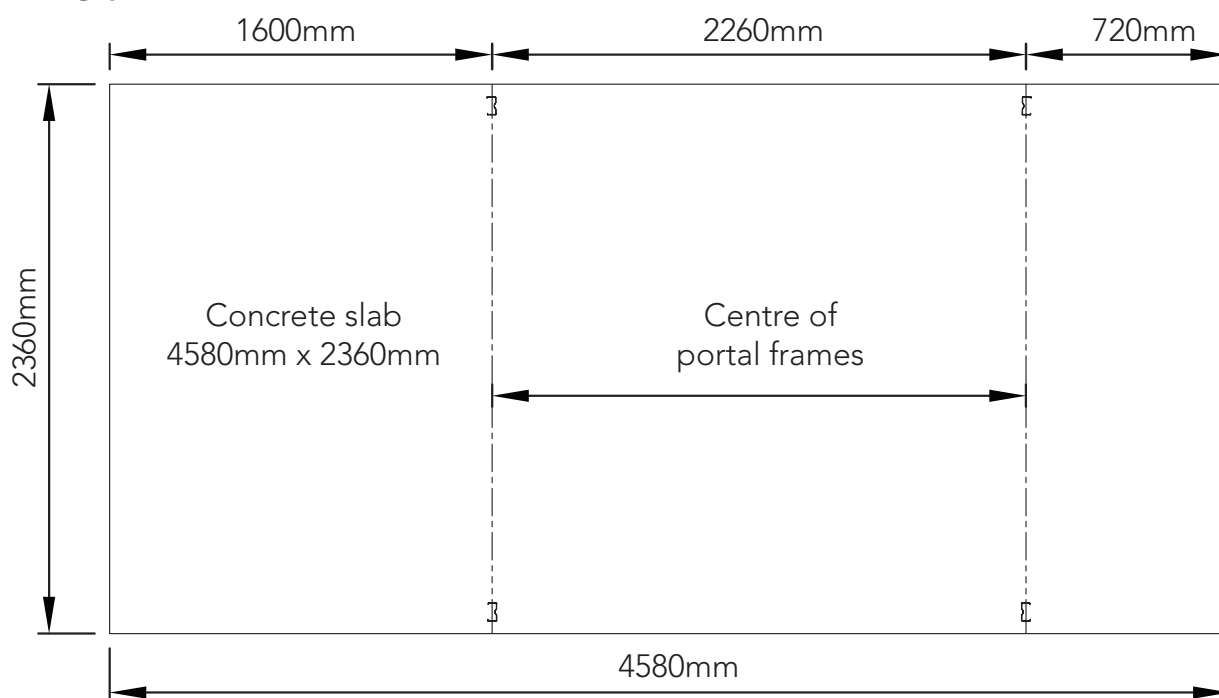

- Secure multipurpose brackets to uprights using self drilling screws
- Move frames into position, mark and drill holes in slab using 10mm masonry drill bit
- Secure frames to slab with M10 dynabolts.

## PANEL CONSTRUCTION


NOTE: Take care to ensure that all wall panels are not upside down. The top channels of each panel are pre-punched for attaching roof sheeting. The base channels are not.

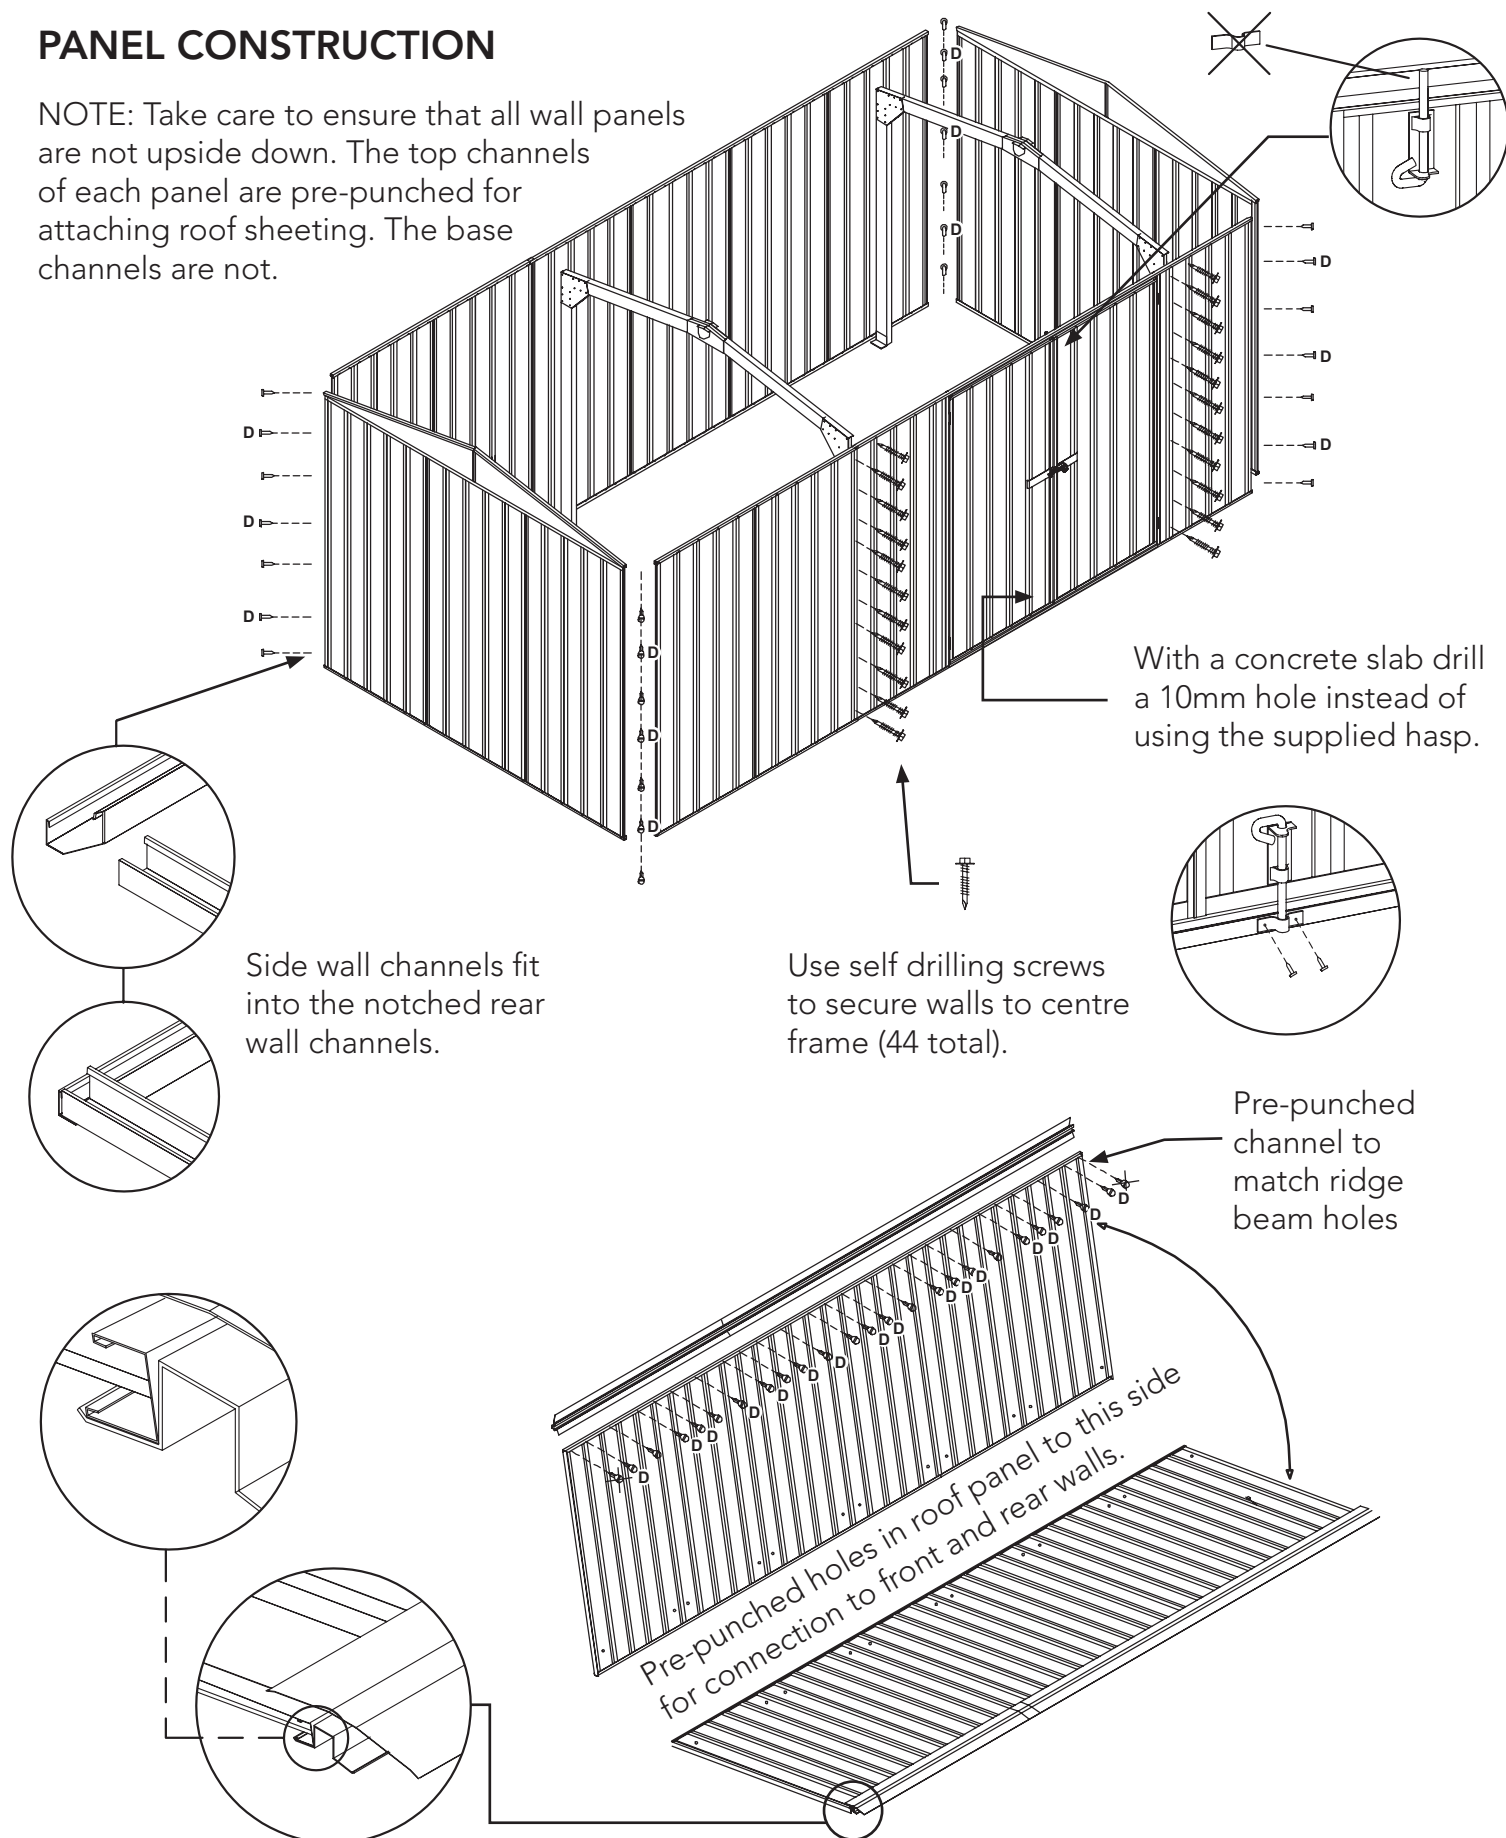


### ROOF CONSTRUCTION

#### STEP 1.

Slide the roof panels into position and secure with only one screw in each corner at this stage.

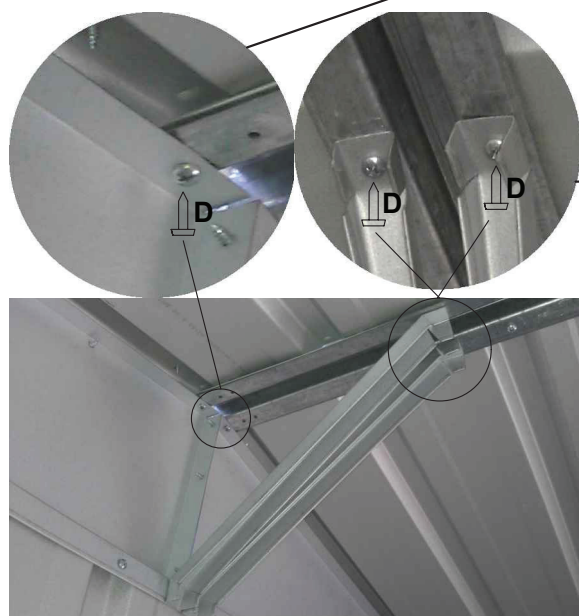


INSIDE VIEW

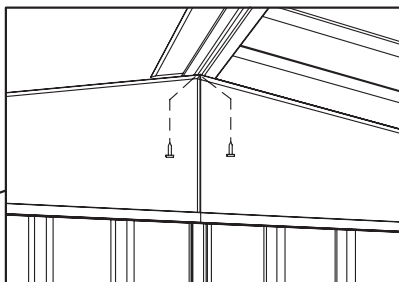

#### STEP 2.


Secure ridge beam to gable sections with two screws at either end.

INSIDE VIEW

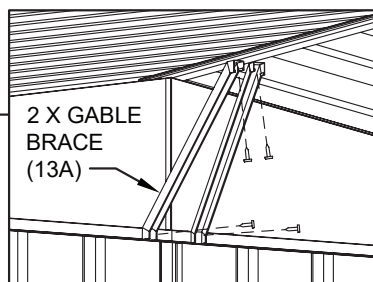


#### STEP 3.

After the roof panels have been secured, fit two gable braces (13A) form the top wall channel to the underside of the ridge beam at 45 degrees as shown to both gable walls

NOTE: This symbol  denotes that holes to be pre-drilled with a 3mm drill bit before fastening.


#### - WARNING -

**Do not climb on or walk on the roof.**

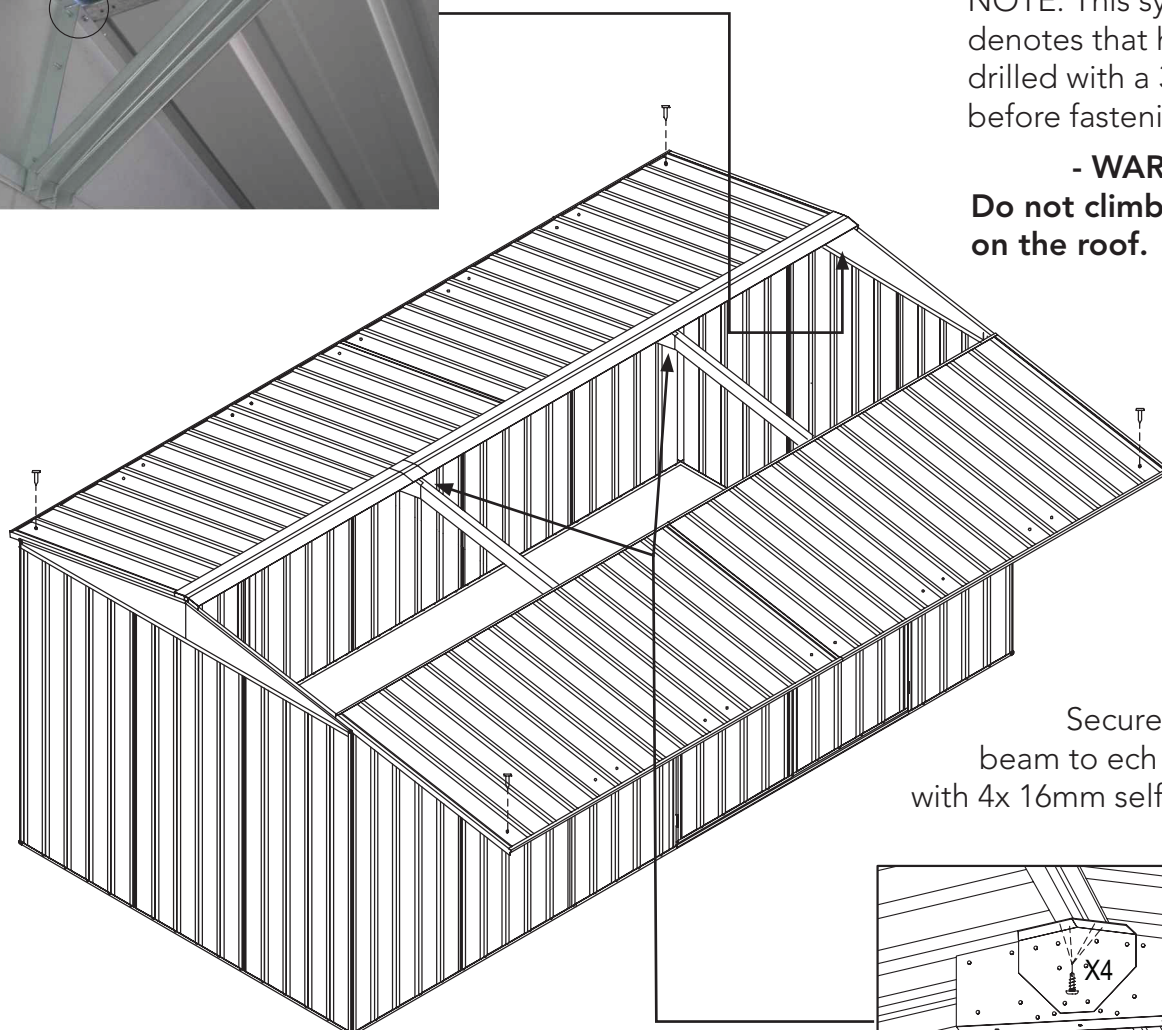

#### STEP 4.

Secure each ridge beam to each ridge plate with 4x 16mm self drilling tek screws.

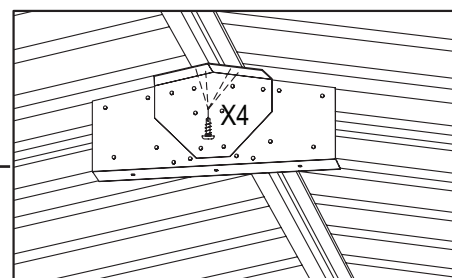

## FINAL CONSTRUCTION

### STEP 1.

Secure the roof panels to the wall panels as shown.

### STEP 2.


Secure the roof panels to the internal frames with self drilling tek screws.

### STEP 3.

Secure the portal frames to the ridge beam as detailed on the previous page.

### STEP 4.

Bend the top and bottom flanges as shown, then hook the bottom flanges under the top channel and screw top to the ridge beam with two screws.

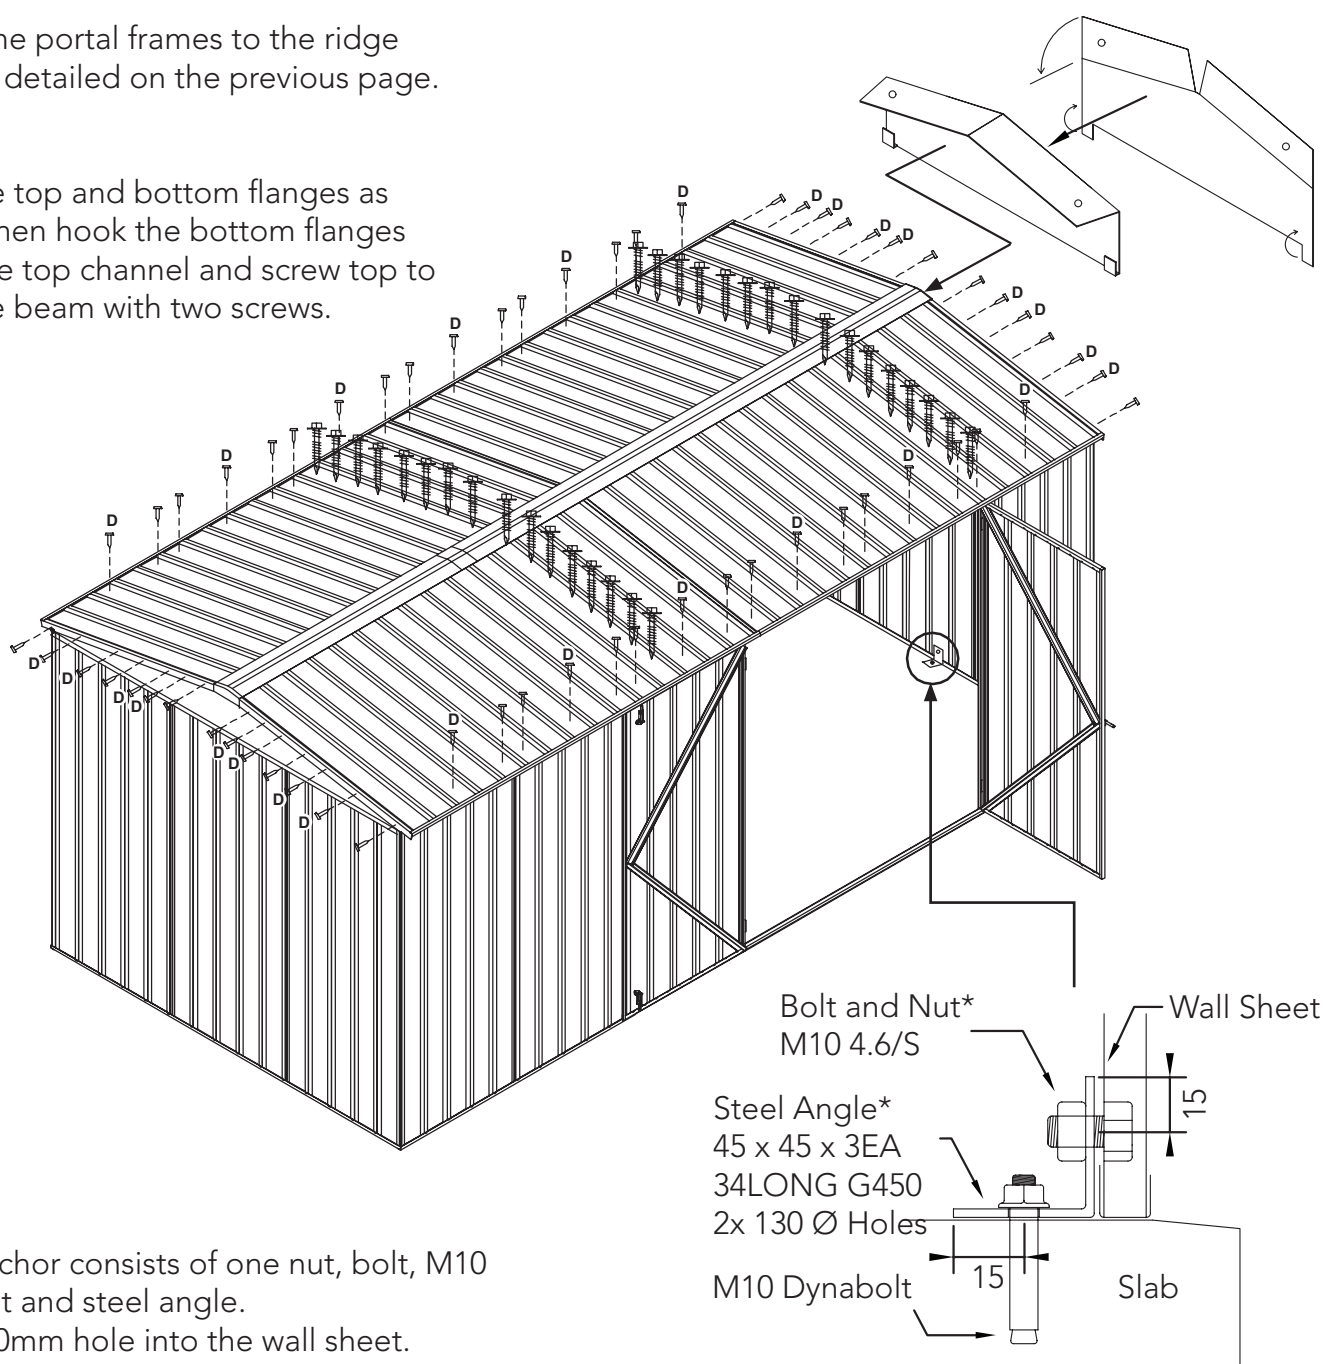

Each anchor consists of one nut, bolt, M10 dynabolt and steel angle.  
Drill a 10mm hole into the wall sheet.  
Drill a 10mm hole into the concrete.

\* Denotes hot dip galvanised finish

## Absco Large Gable Roof Shed Notes

### General

- 1.G This instruction manual shall be read in conjunction with other consultants drawings, specifications and written instructions provided by Absco and/or their representatives.
- 2.G The drawings provided herein are for installation and structural engineering purposes only. If discrepancies are discovered within the documentation provided, these shall be brought to the attention of Absco and written approvals obtained prior to commencing the affected section of work.
- 3.G If in doubt ask.
- 4.G Until approvals from the local authorities are obtained, commencement of construction from these drawings shall not commence.
- 5.G Unless varied by the project specification, all materials and workmanship shall be undertaken in accordance with the relevant Australian standards and the by-laws and ordinances of the relevant building authorities.
- 6.G All dimensions indicated in these drawings shall be verified on site by the installation contractor. Scaling of drawings shall not be undertaken.
- 7.G Prior to commencing works on site, the contractor shall verify the position of all services in the area to ensure that the construction does not interfere with any of those services.
- 8.G During installation on site the shed structures shall be maintained in a stable condition with no part becoming overstressed or permanently deformed.
- 9.G In circumstances where the shed has been installed in a manner which is inconsistent with the installation manual, structural certification shall be void.
- 10.G The structural components detailed within this installation manual have been designed for the following loads in accordance with AS/NZS1170 based on a Class 10a, Type 2 structure:
- Roof Live Load: 0.25 kPa uniformly distributed or 1.1 kN concentrated as per AS/NZS1170.1

Wind Load: Classification N2, Non-Cyclonic to AS4055 where  $V_u = 40$  m/s,  $V_s = 26$  m/s

Windward wall  $C_{p,e} = 0.7$

Leeward Wall  $C_{p,e} = -0.3$  to  $-0.5$  as applicable based on shed geometry

Side Wall  $C_{p,e} = -0.2$  to  $-0.65$  as applicable based on shed geometry

Roof  $C_{p,e} = -0.3$  to  $-1.04$  depending on wind direction

---

## Absco Large Gable Roof Shed Notes


### Steelwork

- 1.S All structural steelwork shall have a corrosion protection system applied consistent with AS/NZS 2312-2002.
- 2.S All structural steelwork detailed within this installation manual shall be minimum Grade 550 for roll formed sections (including roof and wall sheeting and portal frame members) and Grade 250 for angle sections.
- 3.S All multi purpose and anchor brackets for connection onto the supporting reinforced concrete slab (includes 45x45x3EA x 34mm long and 47x47x1.9EA x 80 long) shall be minimum Grade 450.
- 4.S All portal frame knee and apex plates shall be minimum Grade 450
- 5.S All roof, and wall sheeting shall be minimum base metal thickness of 0.3mm
- 6.S All portal frame members shall be minimum base metal thickness of 0.75mm.
- 7.S All snaptite channels and jambs shall be minimum base metal thickness of 0.42mm
- 8.S All top hats shall be minimum base metal thickness of 1.0mm
- 9.S All portal frame knee and apex plates shall be minimum base metal thickness 1.0mm
- 10.S All screw fasteners shall be Phil Pan Head Zinc Plated #8 x 3/4" (STP0820)
- 11.S All bolt fasteners for anchoring shall be M10 minimum grade 4.6/S
- 12.S Installation of screw fasteners shall generally be undertaken in accordance with the relevant provisions of AS1562.

## Absco Large Gable Roof Shed Notes

### Supporting Slab and Foundations

- 1.F The supporting slab foundation for the garden shed shall be of a minimum size indicated on the installation manual. The top surface of the formed slab shall be level and free of any irregularities which would inhibit the installation of the shed.
- 2.F The structural engineering design for the supporting slab foundation shall be undertaken by a suitably qualified structural engineer. The design shall consider all relevant provisions of AS3600 and AS2870.
- 3.F Between adjacent footings or excavations, the contractor installing the slab foundation shall not exceed a rise of 1 in a run of 2 in line of slope.
- 4.F Unless approved in writing by the slab foundation engineer, the limits of excavations near existing footings shall be in accordance with that indicated below.

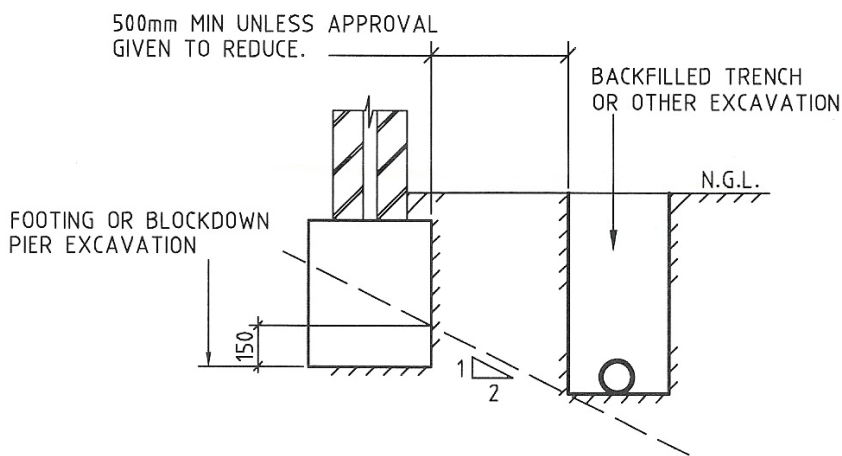

The contractor shall undertake investigatory localised excavations near existing footings to ascertain their depth prior to excavating adjacent to them. It is noted that excavating to a depth below that indicated above shall not be undertaken without the written approval from the engineer.

## Absco Sheds Storage Guidelines

- Absco Sheds are designed to be weatherproof for normal weather conditions. In the event of extreme weather conditions such as heavy rain, combined with high wind gusts, the ridge capping, sheeting joints, screw fixings etc., may exhibit minor deformations which may allow some water entry. These areas should be checked regularly to ensure that maximum strength and protection is maintained.
- Other weather conditions such as extreme heat and extreme cold, moist or dry air can influence the effects of concrete floor moisture and/or condensation on the underside of the roof sheets.
- Absco Sheds and storage units are primarily used for storage of garden equipment such as lawnmowers, wheelbarrows, garden tools etc. Storage items that might be adversely affected by any of the above conditions may require additional protection such as being sealed or covered by plastic sheets and/or stacked above the concrete floor on timber slats.
- Waterproof sealants may be used to offer further protection where required around joins and screw fixings, as can rubber door seals and other products which are available from most hardware outlets.
- Placement of waterproof sealants (silicone) between the base of the shed and concrete slab is not recommended, as this process can have a reverse effect, preventing excess water from escaping, resulting with water accumulating and being trapped inside the shed.
- Absco accepts no responsibility for water entry, floor moisture, condensation or the condition of the Contents inside your Absco steel building arising from any of the pre-mentioned weather conditions.

# Lifetime Warranty Statement



This warranty against defects is given by:

Absco Industries (ABN: 77 869 708 678)  
Address: PO Box 119 Acacia Ridge QLD 4110  
Ph: 1800 029 701  
Fax: 07 3344 1191  
Email: admin@absco.com.au

**Date of issue:** 19 December 2018

## Details of Manufacturer's Warranty

This product comes with a Lifetime structural warranty from the date of purchase. This warranty also applies where there are missing or damaged parts identified in the parts list referred to in the instruction kit within the product packaging.

Please ensure that you keep this warranty form in a safe place along with your proof of purchase. You can register your warranty online <http://absco sheds.com.au/warranty-details/> or complete the form on the back of this document and mail it back to Absco, along with a copy of your proof of purchase.

The benefits of this warranty are in addition to your rights under the Australian Consumer Law (ACL) and in particular, the guarantees implied under the ACL and any other rights and remedies of the consumer under a similar law in relation to the goods and services to which this warranty relates.

## Process of claiming warranty:

To make a claim under the warranty within the warranty period, you will need to contact the manufacturer directly by phone or email:

**Contact Number:** 1800 029 701  
**Contact Email:** admin@absco.com.au

You will be required to produce proof of purchase (this is at discretion of the manufacturer) at the time of the claim.

The manufacturer bears the cost of replacing the products or spare parts or repairing the products and reasonable direct expenses of claiming under this warranty:

Where parts are replaced, the manufacturer will bear the cost of sending the spare part and will endeavour to deliver it to the customer's nearest reseller within 20 working days for the customer to pick up. At such time the customer may be required to return the alleged faulty parts.

Where assessment is required in case of replacing or repairing the product, the manufacturer will appoint an assessor within 10 working days to identify the alleged defect. The manufacturer will bear the repair costs by appointing a local tradesman. The manufacturer may choose to replace the product if the repair or the cost of repair is not feasible. The replacement product will be available for collection from the nearest reseller within 20 working days. The customer will bear the cost of assembly for the replacement product.

## IMPORTANT

### 1. Manufacturer's Disclosure

This warranty against defects shall not apply in the following situations:

- A) Where the product is not assembled in accordance with the instructions provided in the product kit;
- B) Where the product is used to store corrosive materials such as fertilizer, chlorine etc;
- C) The warranty does NOT cover damage caused by storms, wind, rain, snow or poor foundations;
- D) This warranty does not apply to surface deterioration of panels caused by 'Swarf' (Tiny particles of steel debris left from cutting, grinding or drilling operations) that has not been removed after building construction.

### 2. Notes

This product is weatherproof to a certain level; however driving windy rain may cause the product to leak. Condensation may also occur in some weather conditions such as extreme heat or cold. The product should only be used for storing items such as gardening equipment and should not be used for articles that may be prone to damage if they come into contact with moisture.

### 3. Major Defects

If the manufacturer is satisfied that the defect is a major defect, the purchase price may be refunded in lieu of providing a replacement product or repairing the product.

This warranty is provided in addition to other rights and remedies you have under law: Our goods come with guarantees which cannot be excluded under the Australian Consumer Law. You are entitled to replacement or refund for a major failure and to compensation for other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

**If you do not wish to register your warranty online, complete the below form and email, fax or post this form back to Absco, along with a copy of your proof of purchase.**

NAME:

STREET ADDRESS:

POSTAL / ZIP CODE:

STATE / CITY / PROVINCE / REGION:

COUNTRY:

SHED TYPE/CODE:

ORDER NO:

DATE OF PURCHASE:

EMAIL ADDRESS:

DATE REGISTERED:

